



|                         |                            |
|-------------------------|----------------------------|
| Model                   | XE-902                     |
| Resolution              | 1H (360) / 1V (360)        |
| Field of View           | 2 * 360 °                  |
| Number of Channels      | 2 Channels                 |
| Power                   | 40MW                       |
| Wavelength              | 635NM                      |
| Field of View H / V     | 3MM ± / 10M                |
| Viewing Angle           | 4 ° ± 1 °                  |
| Response Time           | ≤3s                        |
| Power (at 50m distance) | 30MW ≥50m distance         |
| Beam Diameter           | > 8.5 mm (at 50m distance) |
| Batteries               | 4 * AA (LR6)               |
| Protection Class        | IP54                       |
| Operating Temperature   | -10 °C to 50 °C            |
| Storage Temperature     | -20 °C to 70 °C            |
| Mounting                | 1/4 " - 20                 |
| Weight                  | 1KG                        |

**XEAST®**



**FDA FC CE**

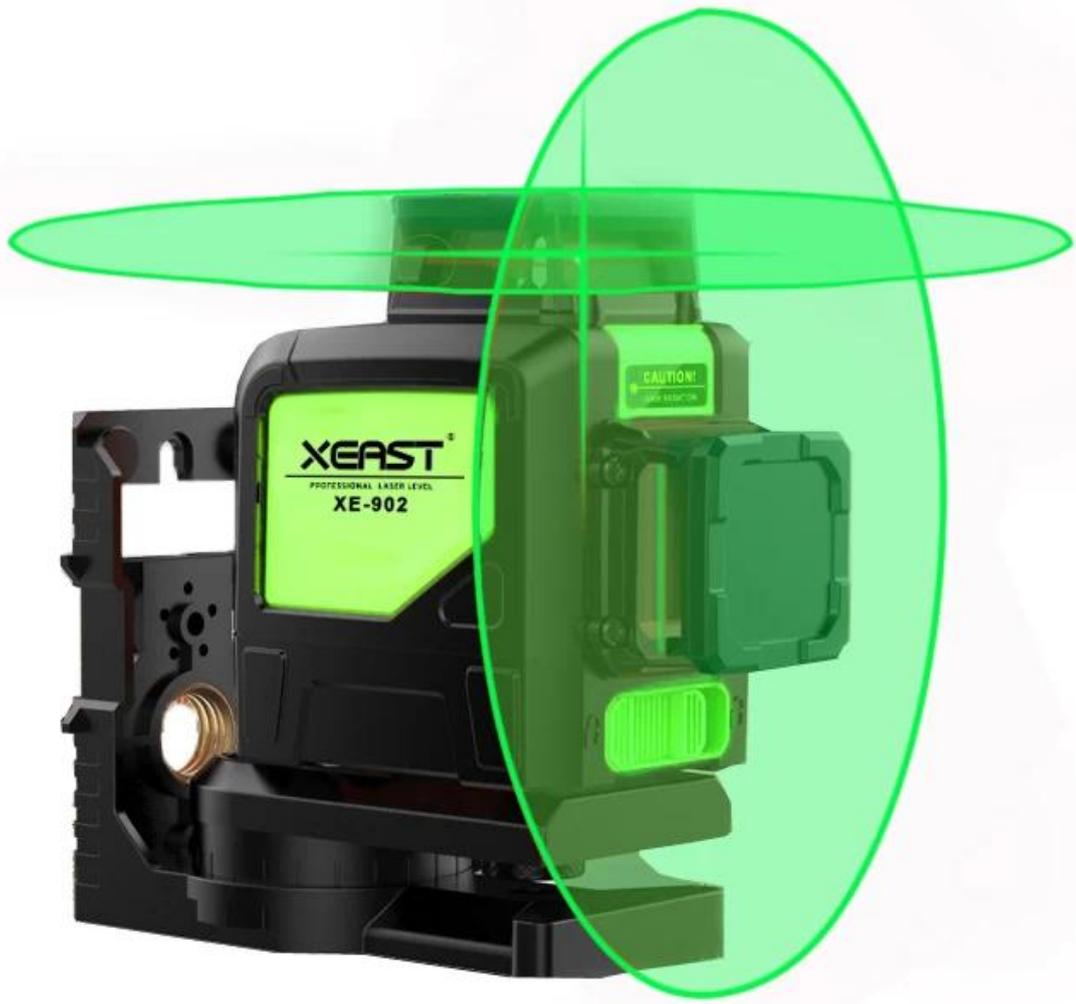

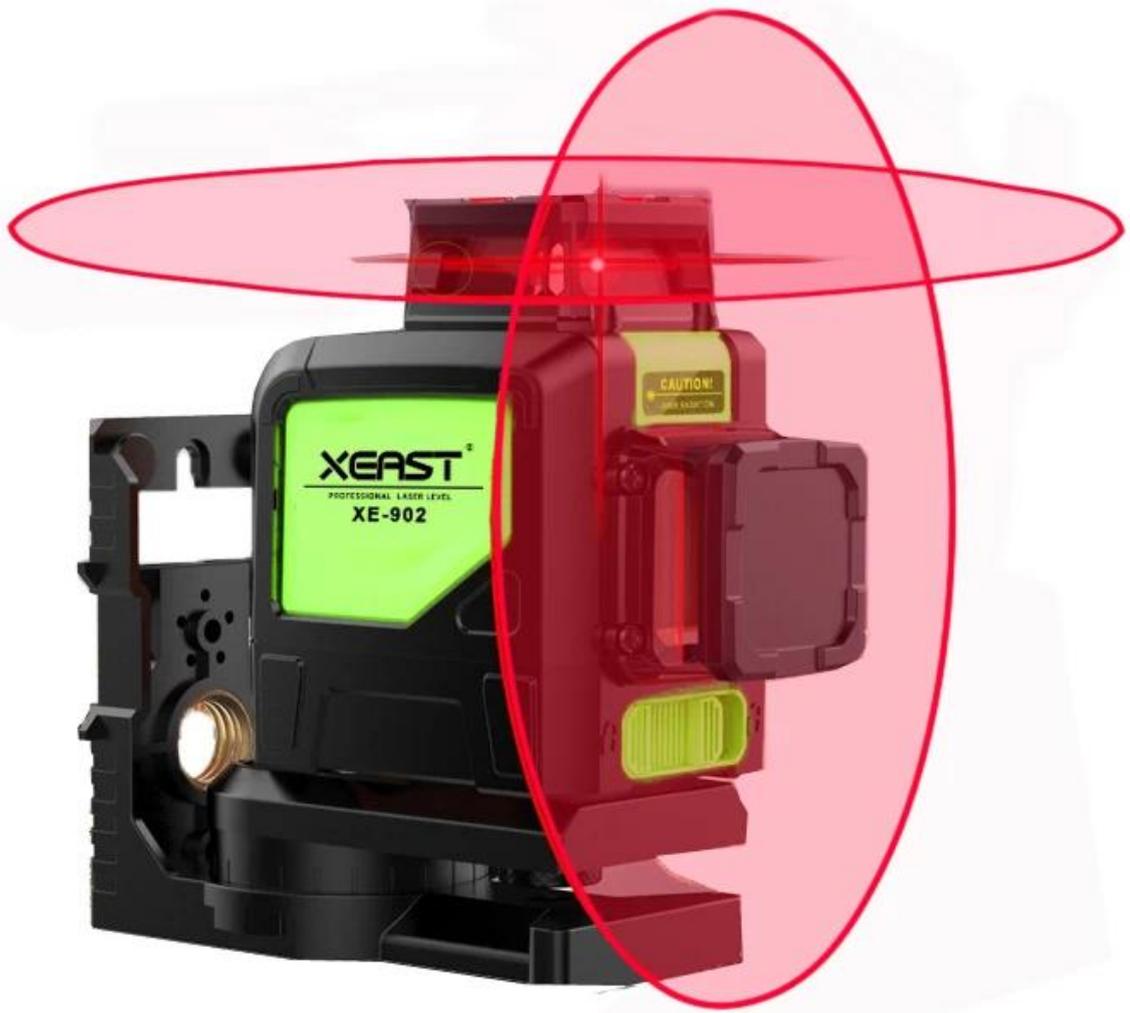



• Laser Window

• Power / Lock




Keypad



• 1/4-20 Threaded Mount

• Battery Compartment

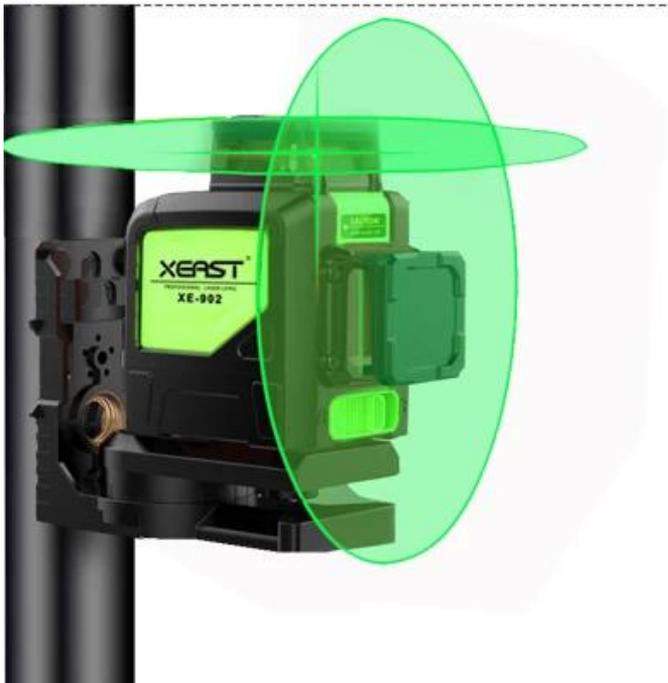

Low battery capacity  
indication with Laser lessens

