- :00000
- $^{\circ}$
- 0.000
- $^{\circ}$







### HT-A2 مواصفات إلى 2019 الجديد صدر الأشعة تحت الحمراء التصوير الة تصوير

	3.2 "	
	320 * 240	
	640 × 480 (300000 [][][]	
0000 / 000000 00000 0000000 000	56 ° X42 ° / 4.0MM	
	0.07 °C	
0000 0000 0000 0000000	-20 °C 4-) °C 300 □□□ ° F to 572 ° F)	
	± 2□ / ± 2 °C	
00 000000 0000 0000000 00000	9HZ	
	8-14um	
	0 0000 000 0 00000 00000 0 000 0 000 0000 .000000 0000 0 0000 0 0000 & 0000	
00000 000	00 0000000 000000 000 00000 00000 0 25 000000 000.	
	3 00000 00000 00 000000G	
	JPG	
	Micro USB 2.0	
	/ 0000 20 / 0000 5 :0000000	
× 00000 × 00000)	140MM × 80MM × 28MM	
	208g	
	0 °C 45 □□□ °C	
	-40 °C 60 □□□ °C	
	& lt85 RH	

1 0000 × 1	
	1
0000000 0000 1 X	

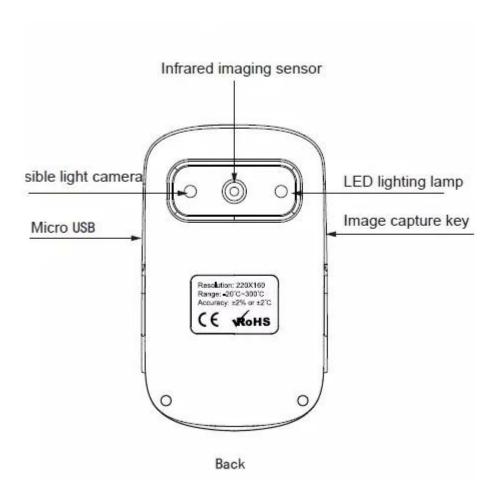

## 4.2. Key Description

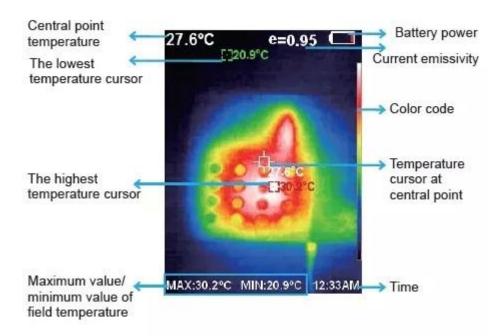

- Color code: used to mark the color corresponding to the relative temperature from low to high in the field of version.
- The central point temperature cursor: used to indicate the central position in the screen area. The cursor color displays white. The temperature value is displayed top left corner of the screen.
- 3. The highest temperature cursor: used to indicate the highest temperature position in the screen area. It will move with the movement of the highest temperature. The cursor displays red. The temperature value is displayed at bottom left corner of the screen.

PRODUCT PICTURES



HT-02A الصور من وجهات نظر مختلفة من التصوير الحراري










# Visible imaging

# 

300,000 high pixels

## Infrared thermal imaging

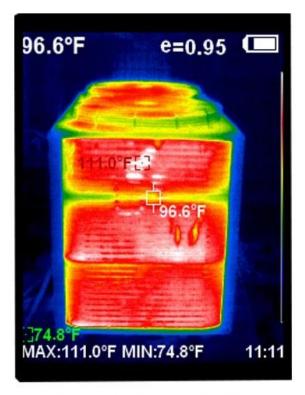


320×240 resolution

APPLICATIONS



# Five major toning imaging modes

Can save/fully display the details of the target object for analysis

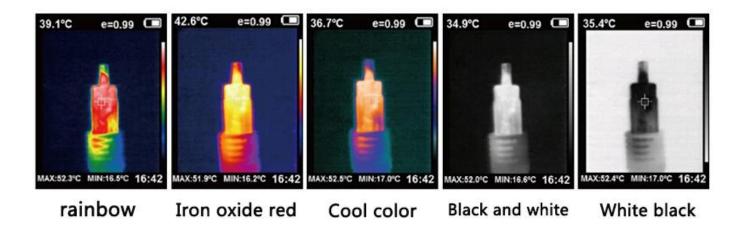

PACKAGE INCLUDE



HT-A2 الحزمة الكاملة إلى كاميرا التصوير بالأشعة تحت الحمراء

