



5.

XEAST®

螢幕	3.2" TFT
螢幕解析度	320 * 240
螢幕像素	640x480 300,000 像素
螢幕/視角	56°X42°/4.0mm
溫度	0.07°C
溫度範圍	-20°C 300°C -4°F 572°F
溫度誤差	±2°/±2°C
濕度	濕度 0.01 1.0
濕度範圍	9HZ
濕度誤差	8-14um
濕度	mm
電池	鋰電池電池 & 電池電池電池
電池	電池電池 25 電池電池電池
電池	3G
電池	JPG
USB	Micro USB 2.0
電池	電池 1800mAh
電池電池	電池 5mm/ 20mm/ 電池
電池 mm × mm × mm	140mm × 80mm × 28mm
電池	208mm
電池	0°C 45°C
電池	-40°C 60°C
電池	< 85%RH
電池	1 電池電池 1 x 電池 1 電池電池電池 1 x 電池 1 電池電池

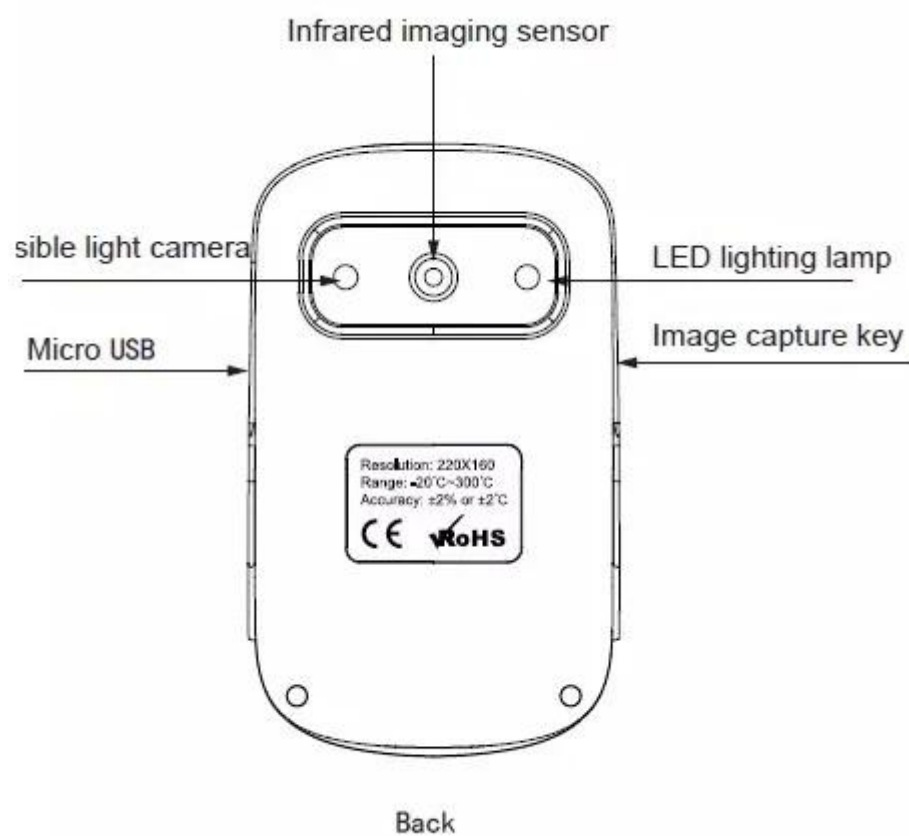

4.2. Key Description

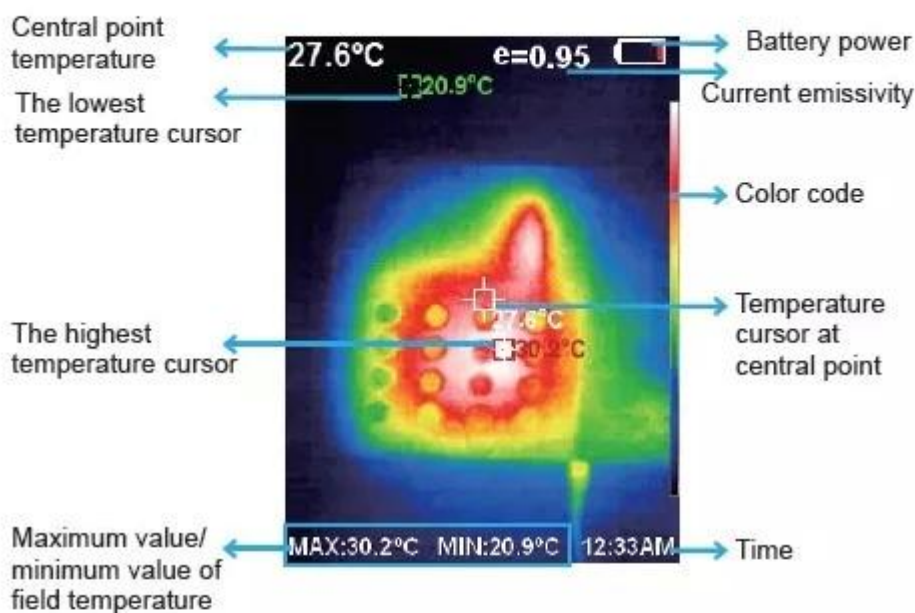

1. Color code: used to mark the color corresponding to the relative temperature from low to high in the field of vision.
2. The central point temperature cursor: used to indicate the central position in the screen area. The cursor color displays white. The temperature value is displayed top left corner of the screen.
3. The highest temperature cursor: used to indicate the highest temperature position in the screen area. It will move with the movement of the highest temperature. The cursor displays red. The temperature value is displayed at bottom left corner of the screen.

● PRODUCT PICTURES

XEAST®

HT-02A

XEAST[®]



XEAST[®]




Visible imaging



300,000 high pixels

Infrared thermal imaging

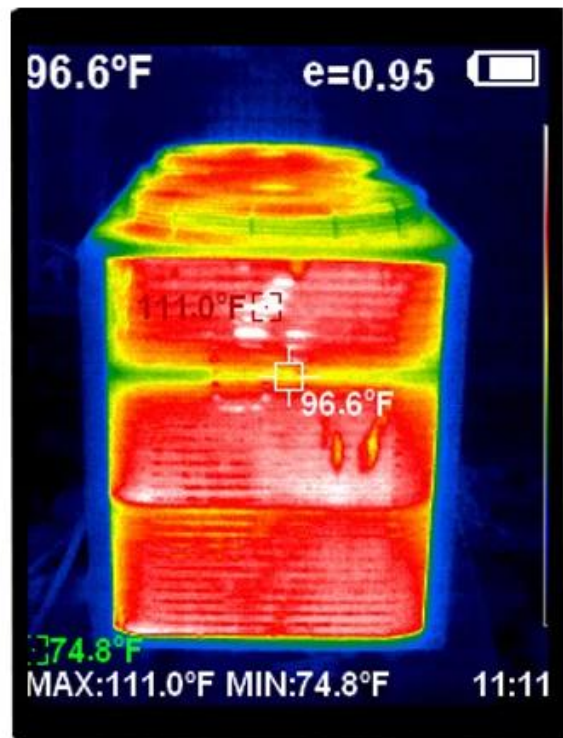

320×240 resolution


● APPLICATIONS

XEAST®

HT-A2

Five major toning imaging modes

Can save/fully display the details of the target object for analysis

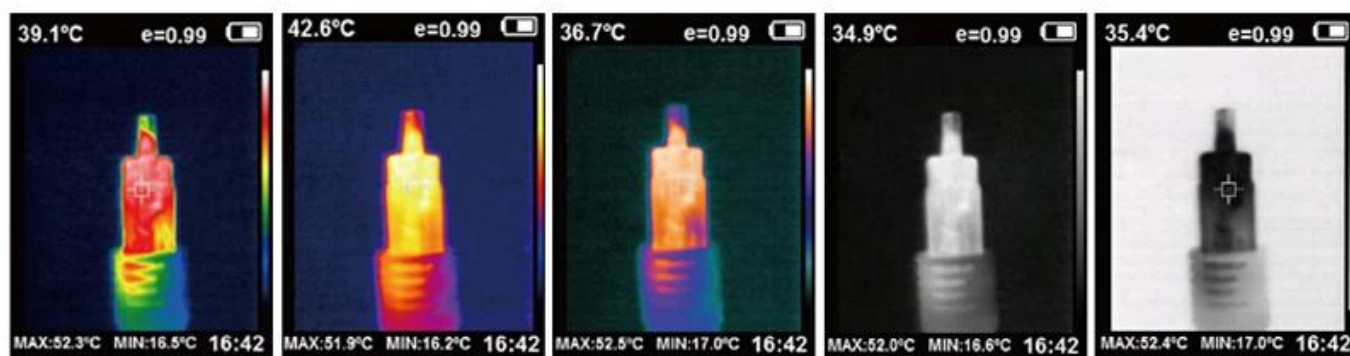

rainbow

Iron oxide red

Cool color

Black and white

White black

● PACKAGE INCLUDE

XEAST®

HT-A2

