SPECIFICATION



XE-27

XE-27
33x33
-20°C∏380°C/ -4°F∏716°F
<u>□□±2°C□±3.6°F□□±2□</u>
2.4"TFT 320x240[[[[[
300,000□□
33°X33°
0.5[]
0.15℃
0.10~1.0
8-14um
-20°C 70°C/ -4°F 158°F ±1.0°C ±1.8°F
0-100 RH 30-10 RH ±3 RH ±4 RH
-30°C~100°C/ -22°F~212°F\\ ±1.0°C\\ ±1.8°F\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
77°F∏40-80∏RH∏
-30°C~100°C/ -22°F~212°F[]±1.0°C[]±1.8°F[][]25°C/
77°F_40-80_RH_
CDUTTE MicrostOCD
SD[]TF Micor[]8GB BMP
4 * 1.5V"AA"
6
-5°C 40°C/ 23°F 104°F; 10 RH 80 RH
-20°C 50°C -4°F 122°F; 10 RH 80RH
260 * 200 *112[[
0.35
1 *0000
1
1 * 8GBU_
1 *000
1 *000 1 *000














XEAST®



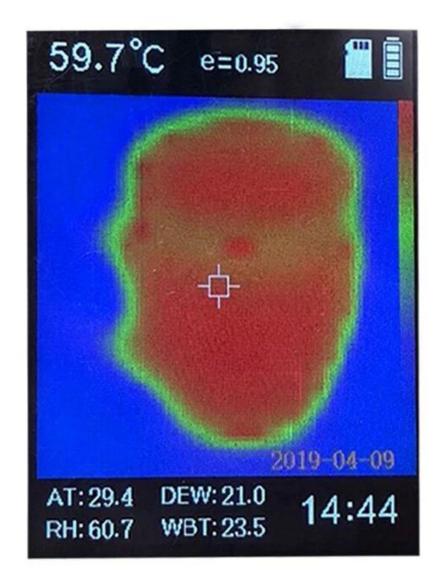



Temp & Humidity Sensor







TERMS OF TRADE











SALES TEAM







Your Testing Partner





WOKRSHOP





