

HT-A1

Display	3.2" TFT
Resolution	220 * 160
Pixel	35,200
Contrast	0.3
Temperature	0.07°C
Operating Temperature	-20°C~300°C/-4°F~572°F
Storage Temperature	±2°C~±2°C/±4°F
FOV / Field of View	35°X26°/4.0"
Weight	
Wavelength	8-14μm
Resolution	0.1-10.0
Frequency	9 HZ
Power	
Power	25W
Storage	SD 4G
Format	JPG
Interface	
USB	Micro USB2.0
Power	5V / 2000mAh
CE	CE/RoHS
Operating Temperature	-5°C~45°C
Storage Temperature	-20°C~60°C
Humidity	10%RH~80%RH
Dimensions	140 * 80 * 28mm / 5.51 * 3.14 * 1.1 "
Weight	450g
Accessories	1 x Main Unit 1 x Power Cable 1 x User Manual 1 x Warranty Card 1 x Accessory

HT-A1

XEAST[®]



XEAST[®]



XEAST[®]



Capture saved images

Can be connected to the computer through USB

Export view and analysis

● APPLICATIONS

XEAST[®]

☐☐☐ ☐☐☐☐☐☐☐☐☐ HT-A1

Application range



Car maintenance



Equipment inspection




Electric box check



Check exhaust system




Motor overhaul

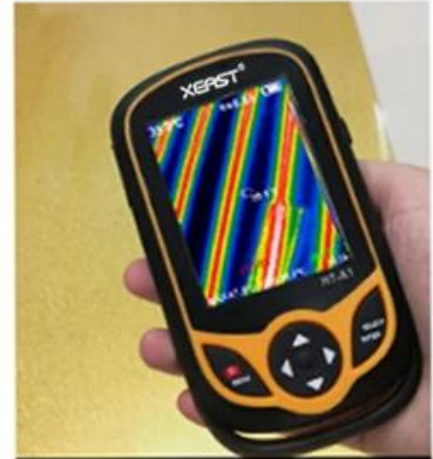

Detection of floor heating

Real shot display

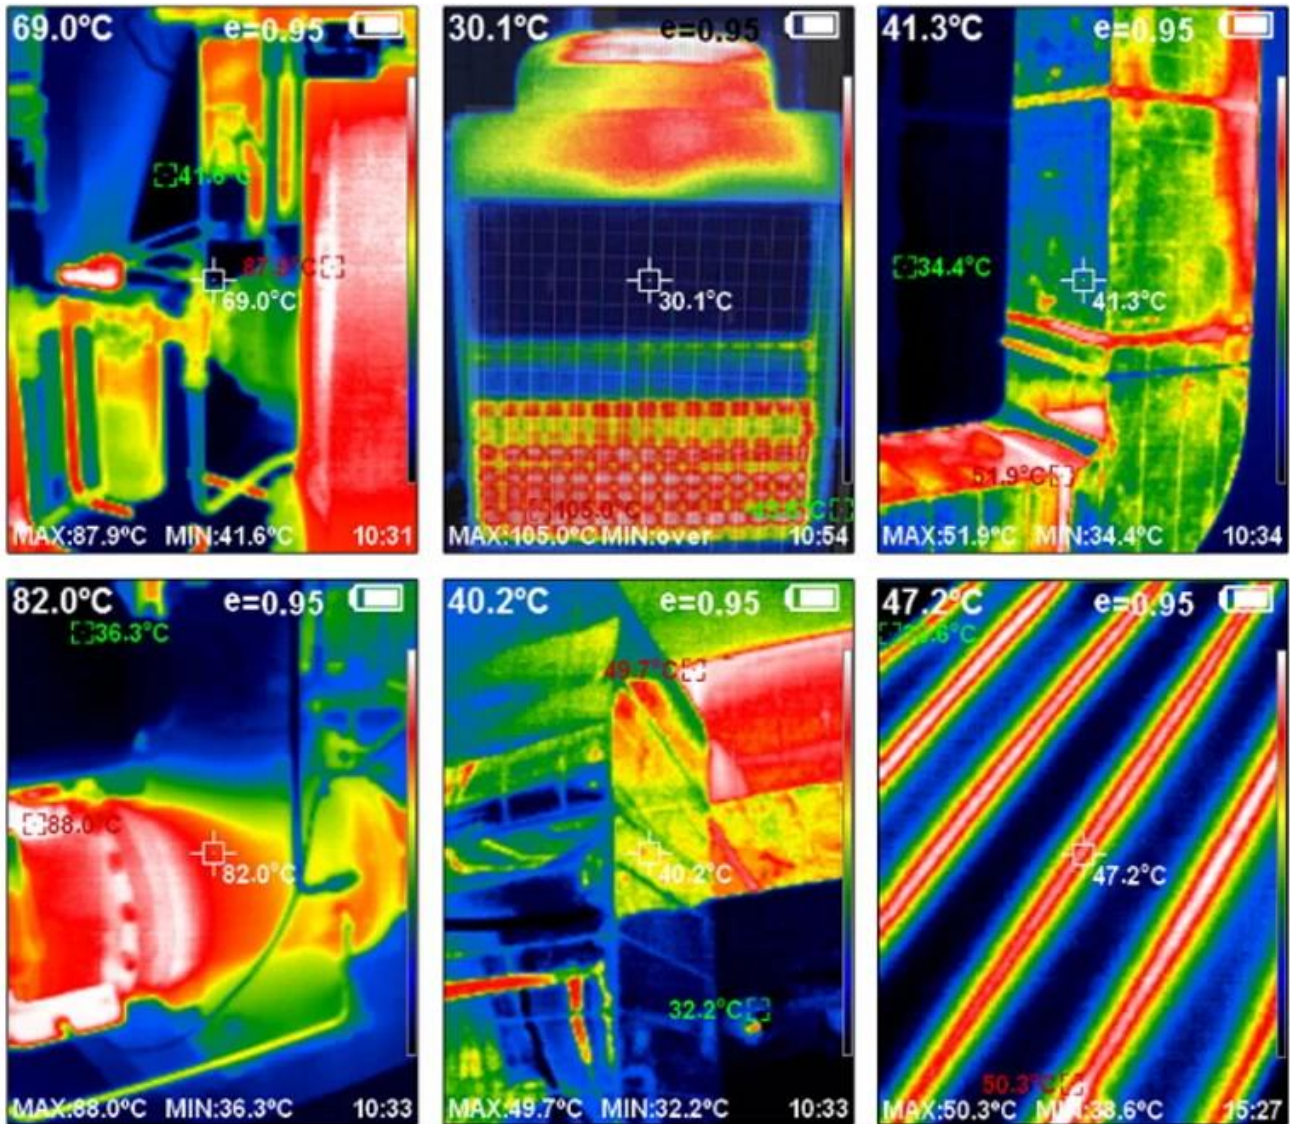

● PACKAGE INCLUDE

XEAST®

HT-A1



● **TERMS OF TRADE**

XEAST®

● **COMPANY INFORMATIONS**

XEAST®



SALES TEAM



WOKRSHOP

