• SPECIFICATION



- $\label{eq:continuous_likelihood$
- $\square\square\square\square\square635nm \setminus 510nm$
- $\square\square\square\square$ ±3mm / 10m
- ____±2mm / 10m
- Down Plumb $\square\square$ ±3mm / 10m
- $\square\square\square\square\square3s$
- ____H110°/ V180°
- $\Box\Box/\Box\Box\Box\Box\Box4^{\circ}\pm1^{\circ}$
- _______25<mark>_</mark>_/15_\50__/20_
- 0002×AA000> 1500mA000000

- ____-20°C + 70°C

PRODUCT PICTURES







VARIOUS KINDS OF FIXING METHOD








POWER ON

Short press the power key or slide locking switch to turn the laser tool ON.

OFF

Lock the pendulum before short press the power button to turn the laser tool OFF.







self-leveling mode





Self-level Available




Within 4 Degree



Pendulum Unlocked











Blinks Every 3 Seconds





Pendulum Locked







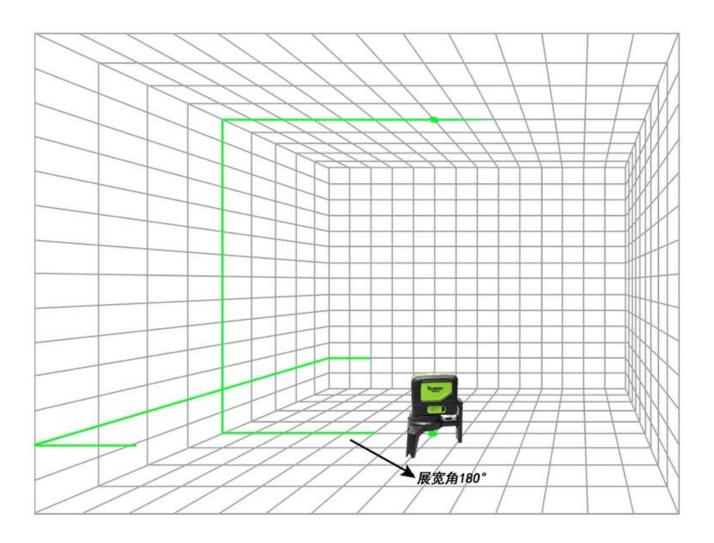

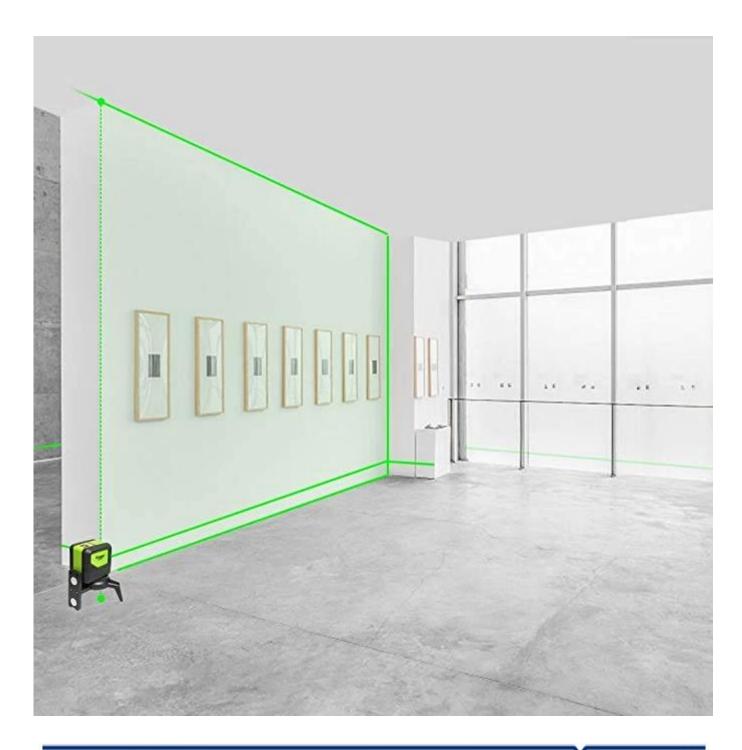

PACKAGE INCLUDE







TERMS OF TRADE

XEAST®

2000000







SALES TEAM







Your Testing Partner





WOKRSHOP





