

HT-A1

Display	3.2 inch TFT
Resolution	220×160
Pixel	35,200
Contrast	0.3
Temperature	0.07°C
Operating Temperature	-20°C~300°C / -4°F~572°F
Storage Temperature	±2°C / ±4°F
FOV / Field of View	35°×26° / 4.0mm
Weight	
Power	8~14μm
Frequency	0.1-10.0
Frequency	9 HZ
Frequency	
Frequency	25
Frequency	SD 4G
Frequency	JPG
Frequency	
USB	USB2.0
Frequency	5 / 20
Frequency	CE RoHS
Frequency	-5°C~45°C
Frequency	-20°C~60°C
Frequency	10 RH~80 RH
Frequency	140 * 80 * 28 mm / 5.51 * 3.14 * 1.1 "
Frequency	450g
Frequency	1× 1× 1× 1× 1×

HT-A1

XEAST[®]



XEAST[®]





Capture saved images

Can be connected to the computer through USB

Export view and analysis

Application range



Car maintenance



Equipment inspection




Electric box check



Check exhaust system




Motor overhaul

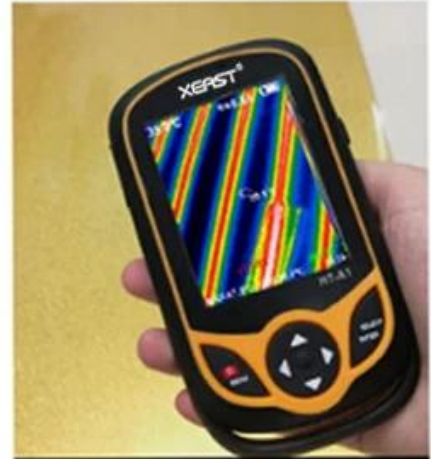

Detection of floor heating

Real shot display

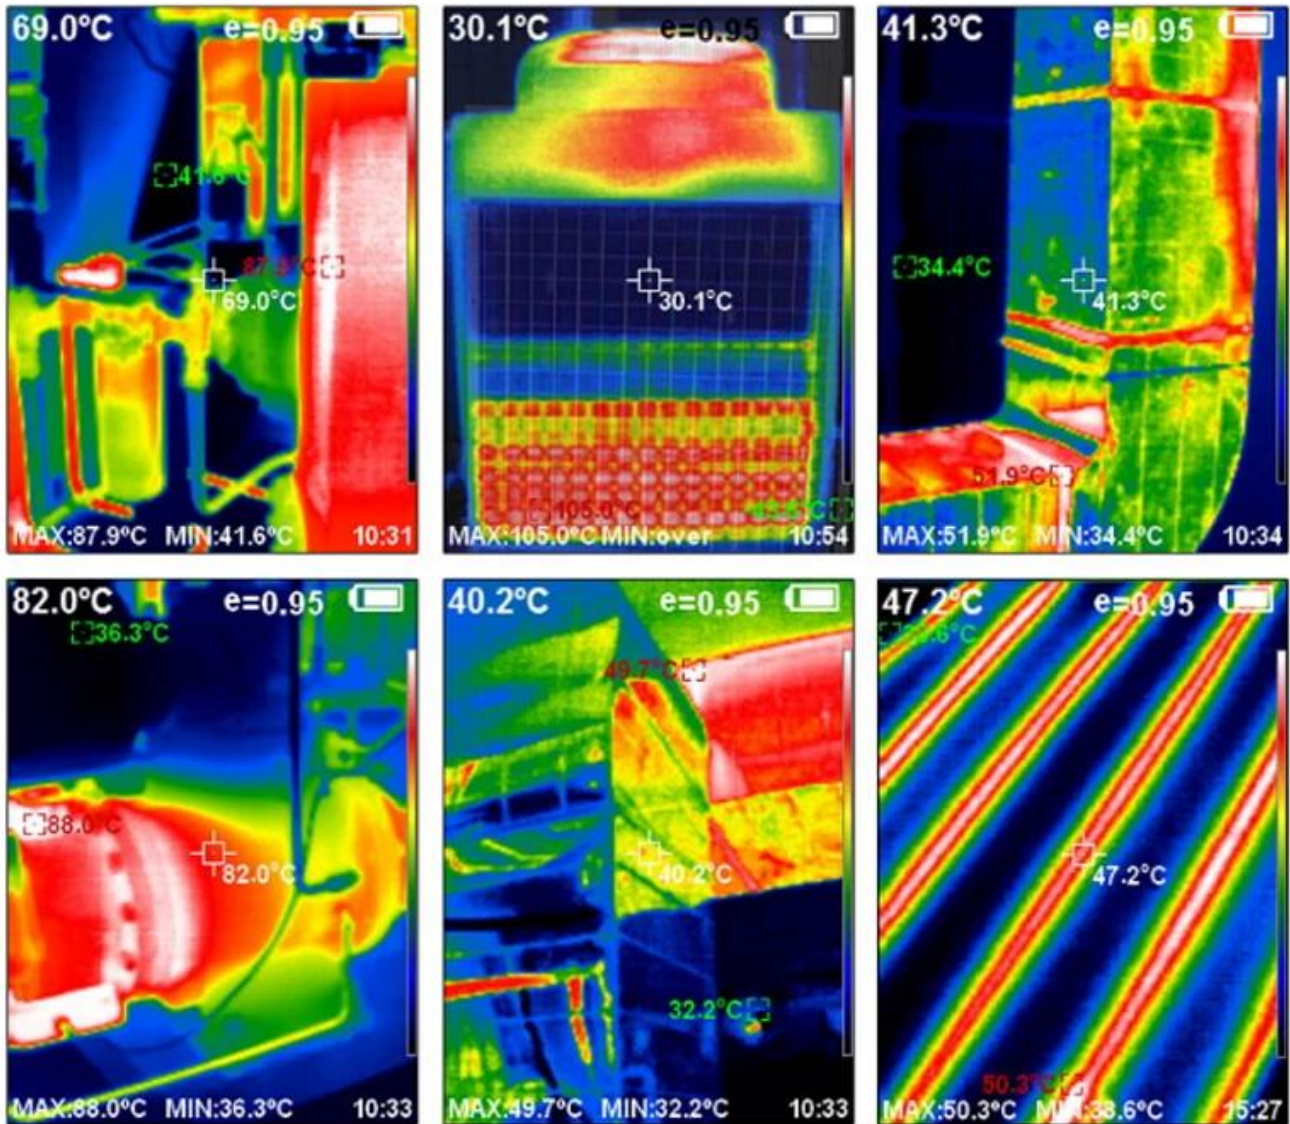

● PACKAGE INCLUDE

XEAST®

HT-A1□□□□□□□□□□□□□□□□





SALES TEAM



WOKRSHOP

