

XEAST XE-P 红外线测温仪

品牌	XEAST XE-P 红外线测温仪
系列	XEAST 红外线测温仪 XE-P 系列
型号	XE-40P XE-60P XE-80P XE-100P
量程	0.05~40m 60m 80m 100m
精度	±1.5mm ±0.06in
分辨率	0.1mm
测量范围	10~1000℃
显示	液晶显示屏/背光/红外发射器/红外接收器
测量时间	30秒/30秒/30秒/30秒
发射率	0.1~0.95 635nm <1mW II
防护等级	IP54 防尘防水
工作温度	0~40℃
尺寸	10.5 * 4.2 * 2.5cm / 4.13 * 1.65 * 0.98in
重量	2 x AAA 电池

XEAST XE-P 红外线测温仪









● APPLICATIONS

XEAST®

0.1m 0.2m 0.3m 0.4m 0.5m 0.6m 0.7m 0.8m 0.9m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m 11m 12m 13m 14m 15m 16m 17m 18m 19m 20m 21m 22m 23m 24m 25m 26m 27m 28m 29m 30m 31m 32m 33m 34m 35m 36m 37m 38m 39m 40m 41m 42m 43m 44m 45m 46m 47m 48m 49m 50m 51m 52m 53m 54m 55m 56m 57m 58m 59m 60m 61m 62m 63m 64m 65m 66m 67m 68m 69m 70m 71m 72m 73m 74m 75m 76m 77m 78m 79m 80m 81m 82m 83m 84m 85m 86m 87m 88m 89m 90m 91m 92m 93m 94m 95m 96m 97m 98m 99m 100m



The Scope of Application

Engineering Measurement



Distance Measurement



Steel Engineering



Building Inspector



Planning Industry



Home Installation



Transportation/Decoration Industry





Fast



Convenient



Low Consumption



High Sensibility



Data Storage



Backlight



Beeper




Range Calibration










▼ Addition/Subtraction Measurement

Addition

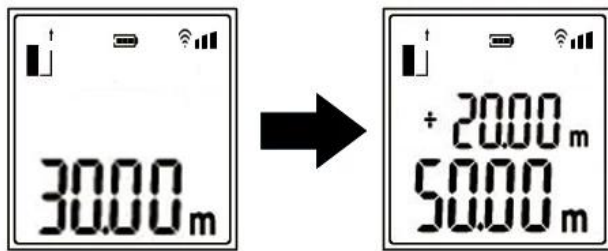

Subtraction

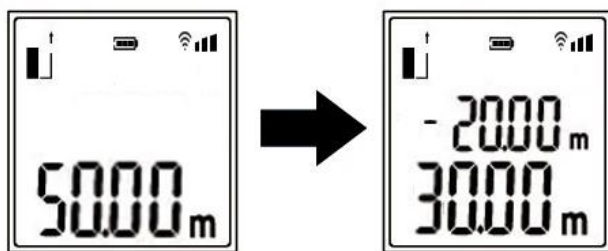

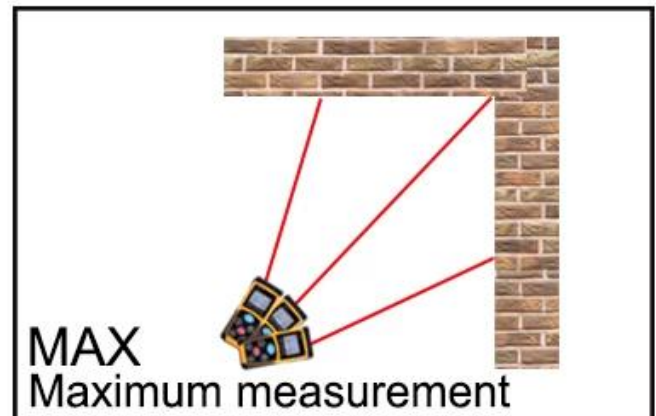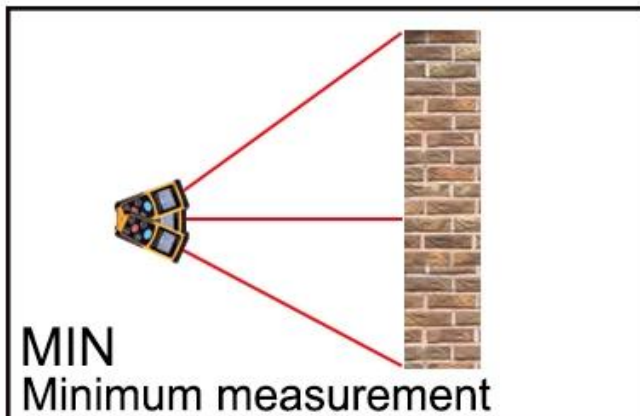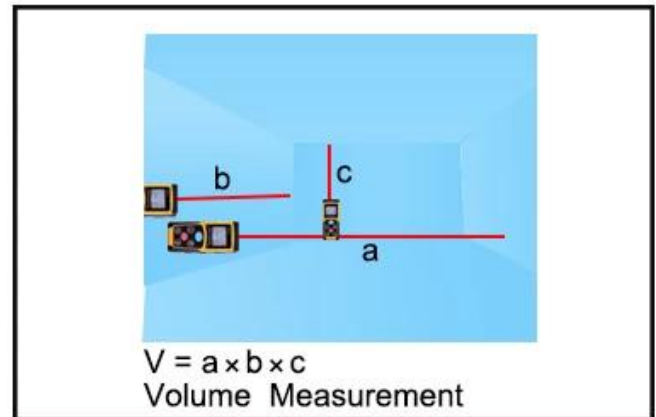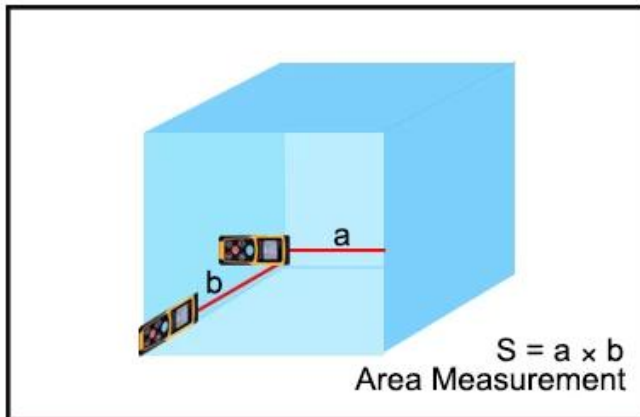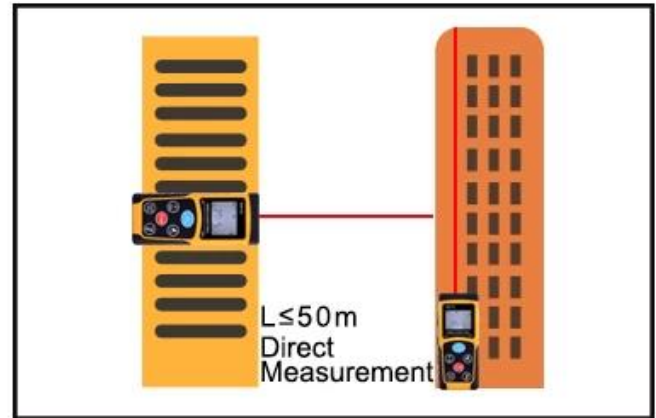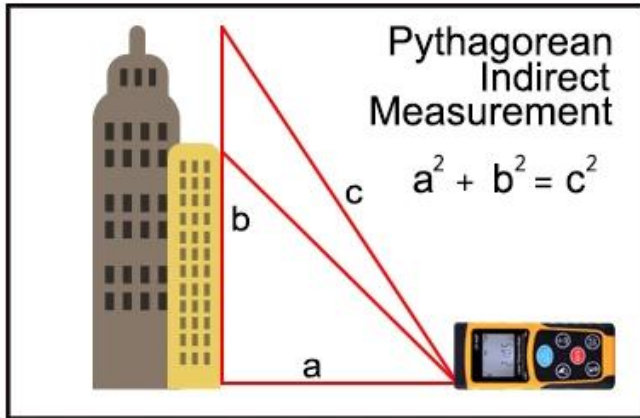

● TERMS OF TRADE

XEAST®

1. GENERAL

1.1. SCOPE

1.1.1. This contract is for the supply and installation of the following equipment:

1.1.2. 30 units of the following equipment:

2. SPECIFICATIONS

2.1. The equipment shall be of the following type: oftern Express DHL TNT UPS EMS SPSR 139 Express

2.2. LCL FCL

2.3. The equipment shall be of the following type: oftern Express DHL TNT UPS EMS SPSR 139 Express



SALES TEAM



XEAST®
Your Testing Partner



WOKRSHOP

