

Infrared HT-02D

Resolution	2.4 MP (2592 x 1944) pixels
Pixel	32 * 32
Pixel Size	1024 pixels
Pixel Pitch	0.3 mm
Temperature Range	-20 °C ~ 300 °C (-4 °F ~ 572 °F)
Accuracy	± 2 % (± 2 °C / ± 4 °F)
FOV / Field of View	20 * 20 / 0.5m
Resolution Accuracy	0.5 °C
Wavelength	8-14µm
Resolution Accuracy	0.1 ~ 1.0 mm
Resolution Accuracy	6HZ
Resolution Accuracy	mm
Resolution Accuracy	mm, mm, mm, mm (mm) mm (mm)
Resolution Accuracy	5 mm mm mm mm mm mm mm mm.
Resolution Accuracy	SD (4G)
Resolution Accuracy	BMP
Resolution Accuracy	mm / mm / mm mm / mm
Resolution Accuracy	4 * 1.5V AA
Resolution Accuracy	6
Resolution Accuracy	12
Resolution Accuracy	CE, RoHS
Resolution Accuracy	-5 °C ~ 40 °C (23 °F ~ 104 °F)
Resolution Accuracy	-20 °C ~ 50 °C (-4 °F ~ 122 °F)
Resolution Accuracy	10 % RH ~ 80 % RH
Resolution Accuracy	21.2 * 9 * 6.2cm / 8.3 * 3.5 * 2.4in
Resolution Accuracy	231.2g / 8.2oz
Resolution Accuracy	27 * 19 * 11cm / 10.6 * 7.5 * 4.3in
Resolution Accuracy	927g / 32.7oz
Resolution Accuracy	1 * mm mm mm 1 * SD (4G) 1 * mm mm 1 * mm mm 1 * mm mm












● APPLICATIONS

XEAST®

HT02D

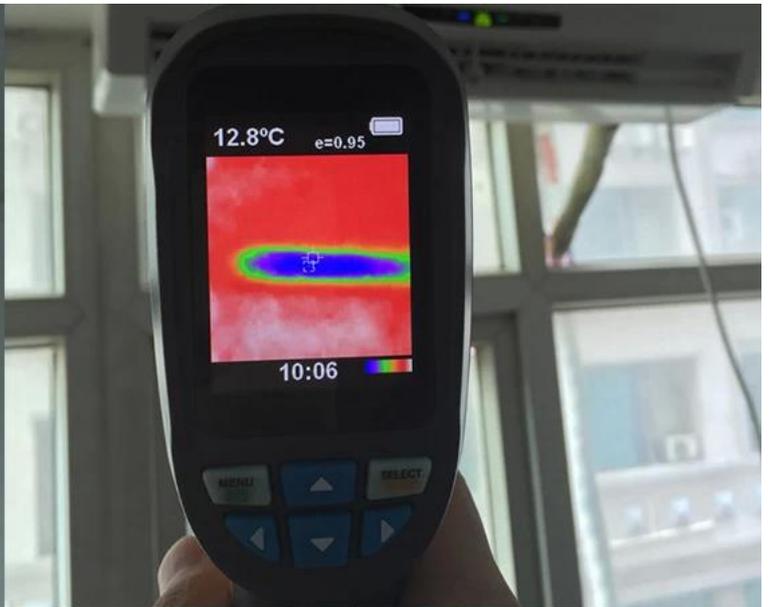

● TERMS OF TRADE



□□□ □□ :

1). □□ □□:
 □□□ T / T, L / C, Paypal, MoneyGram □ Western Union□ □□□□□.
 □□ □□ 30 % □□□ □ □□ 70 % □□.

2). □□ □□ :
 □□□ □□□□□ □□ □□ □ □□□ □□ □□□□□. □□ oftern □□ □□□□□ (DHL, TNT, UPS, □□□ □□□□□, EMS, SPSR, 139 □□
 □□□ □□), LCL, FCL
 □□□□ □□ □□□□ □□ □□ □ □□□, □□□□ □□□ □□ □□ □□□ □□ □□□ □□ □□□.

● COMPANY INFORMATIONS





SALES TEAM



WOKRSHOP

