

2019 XEAST LCD 2019 XE-915

● SPECIFICATION



速度	速度	湿度
0.4 ~ 30.0 m / s	0.1 m / s	± (3 % + 0.3m / s)
1.4 ~ 108 Km / h	0.1 Km / h	± (3 % + 1.0 Km / H)
0.9 ~ 67.0 MPH	0.1 MPH	± (3 % + 0.4 MPH)
0.8 ~ 58.0 mph	0.1 mph	± (3 % + 0.4 mph)
80 ~ 5900 fpm / min	1.0 ft / min	± (3 % + 40 fpm / min)
温度	-20 °C ~ 70 °C / -4 °F ~ 158 °F	
精度	± 1.5 °C / 2.7 °F	
分辨率	0.1	
响应时间	300ms	
报警设置	ON/OFF	
报警范围	报警范围：15 °C ~ 30 °C，报警延迟：10 ~ 999秒	
报警模式	3 * 1.5V "AAA"电池	
工作条件	温度：20 ~ 60 °C / 4 ~ 140 °F 湿度：10RH % ~ 90RH %	
存储条件	温度：20 ~ 60 °C / 4 ~ 140 °F 湿度：10RH % ~ 75RH %	
尺寸	178.5 * 56 * 30.5mm	
重量	84g	

[illegible]

● PRODUCT PICTURES










Application field



Meteorological

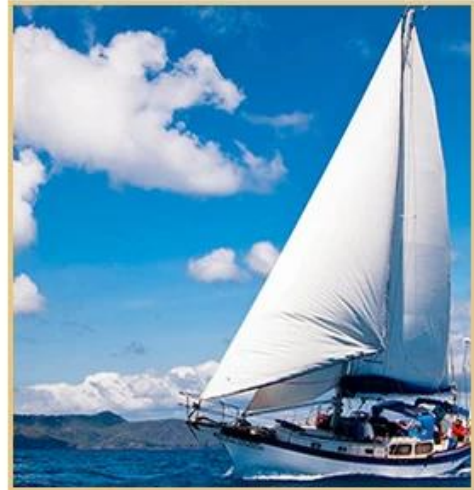

Going to sea



Air outlet



Industry





SALES TEAM



WOKRSHOP

