SPECIFICATION

□□ □□□ □□ : 532nm

□□ □□□ : ± 3mm / 10m

□□ □□ □□ : plusmn4deg

□□ □□ (□□) : 20m

□□ □□ □□ : 18650 □□ □□□

□□ □□ : 6 □□

□□ □□ : -10degC ~ + 55degC

□□□ □□□ : □□□ II

□□ □□ : IP 54

□□ □□ : □

PRODUCT PICTURES

XEAST®

XEAST
Professional laser leve

DC-5V ±0.5-1.5A

DC-5V±0.5-1.5A

Magnet
Up and down Angle fine-tuning knob
Quick pan knob
Pan adjusting knob
360°Fine tuning knob
control panel
XEAST
Professional laser level
Vertical laser window
Pendulum lock and power switch
Battery compartments
Horizontal laser window
Lifting platform

leveling bubble
Vertical line switch
Tilt functin/Pulse mode Switch
Long press to turn the
tilt function on and off
OUT
V1
V2
H
Horizontal line switch

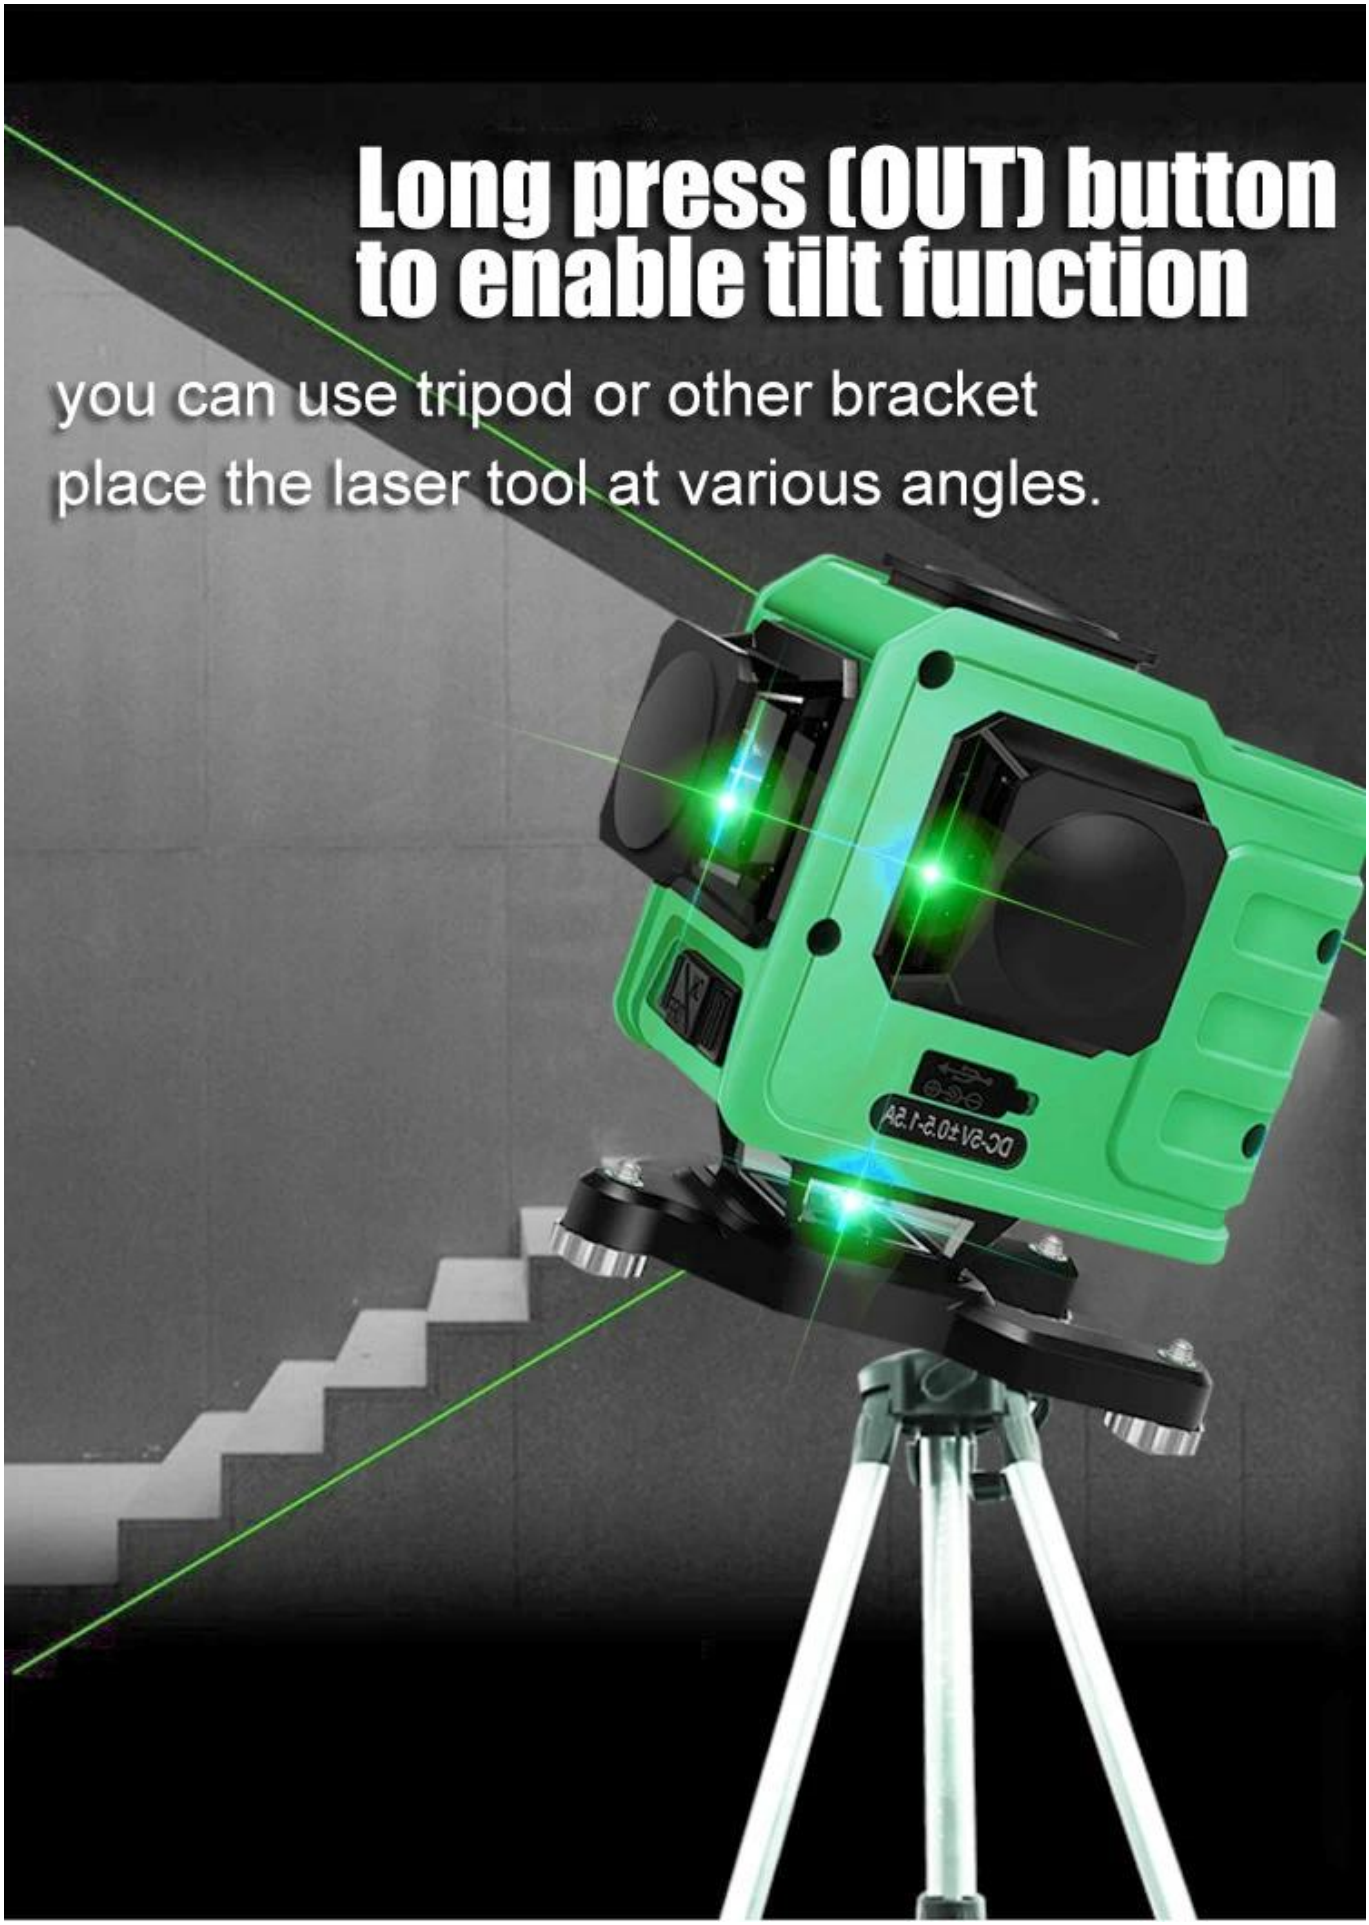
Long press (OUT) button
to enable tilt function
you can use tripod or other bracket
place the laser tool at various angles.

self leveling
alarm prompt ≤4° self-leveling
≥4° buzzer alarm
±4°
XEAST®
Professional laser level
ON
OFF

● PACKAGE INCLUDE

XEAST®

Terms of Trade

1). □□ □□ : □□□ T / T, L / C, Paypal, MoneyGram □ Western Union□ □□□□□.
□□ □□ 30 % □□□ □ □□ 70 % □□.
2). □□ □□ :
□□□ □□□□□ □□ □□ □ □□□ □□ □□□ □□ □□□□□. □□ oftern □□ □□□□□ (DHL, TNT, UPS, □□□ □□□□□, EMS, SPSR, 139 □□ □□□ □□), LCL, FCL
□). □□□ □□ □□□□ □□ □□ □ □□□, □□□ □□□ □□ □ □ □□□ □□ □□□ □□□□ □ □□□□.

Company Informations

SALES TEAM
YEAST®
Your Testing Partner
WOKRSHOP