
● SPECIFICATION

XEAST®


□□:
□□ □□ : 3D □□ □□ 12□ □ □ □□□
□□ □□ □□ : ± 3 °
□□□ □ : □ 7mm
□□ □□ : □ 2cm
□□ □□□ : 5m ± 1mm
□□ □□□ 5m ± 1mm
□□□ □□ : 2 * 18650 □□ □□□
□□ □□ 20 □□
□□ 2mm / 5m
□□□ : 360 * 3
□□ □□ □□ : -10 ° C ~ 40 ° C
□□ □□ : □□ / □□
□□ □□ IP54 □□ □ □□
□□□ □□ : □ 1.6kg

● PRODUCT PICTURES

XEAST®

 XEAST®



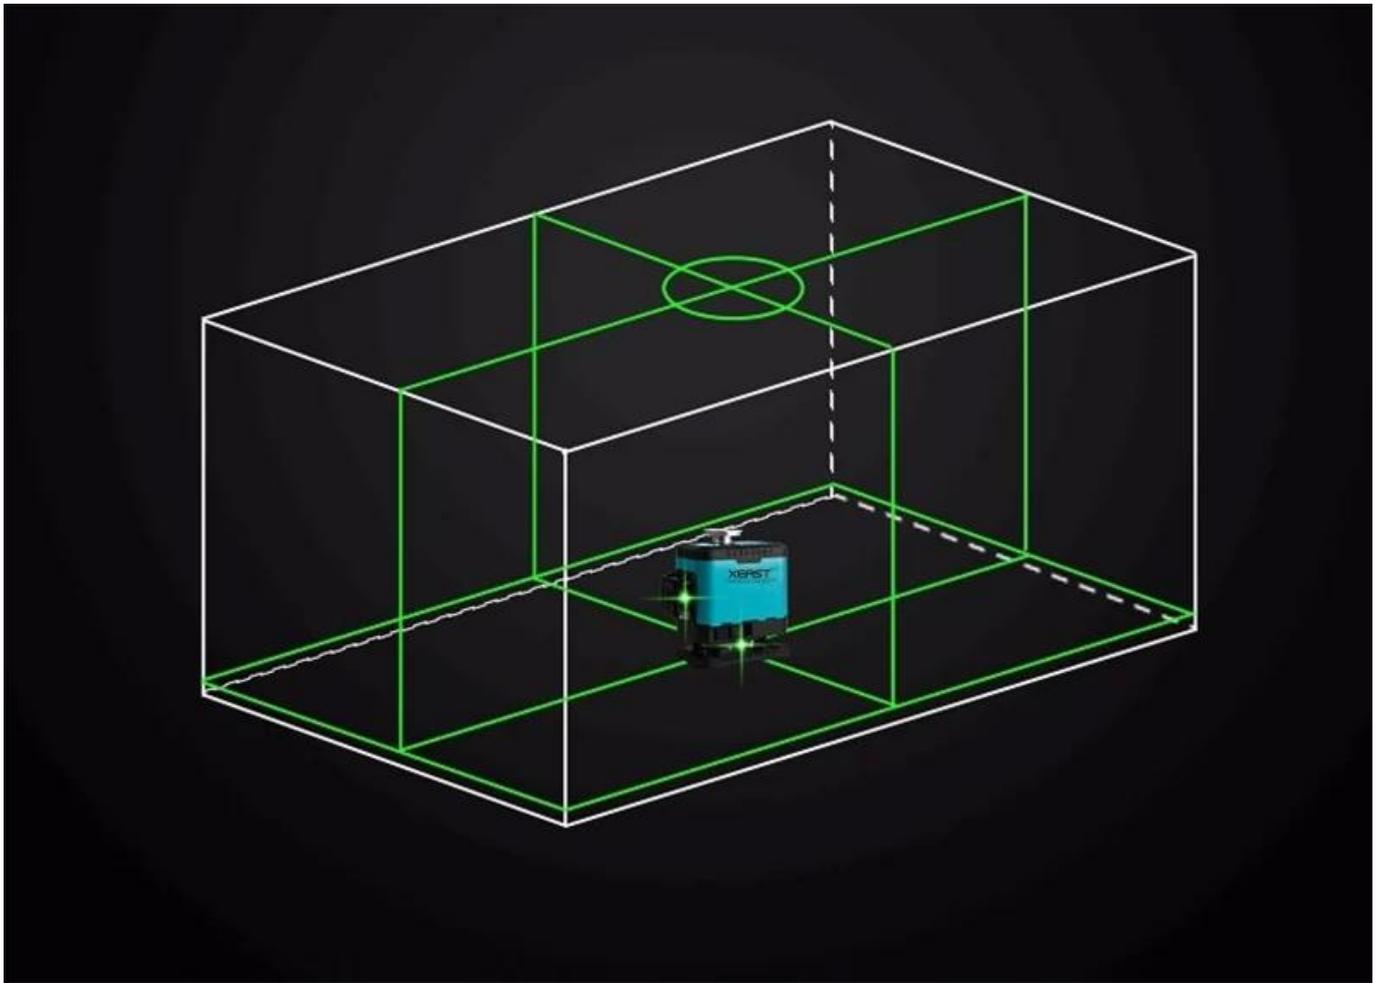





Close to the ground and wall



2 cm on the ground

7 mm on the wall

Tilt mode



Remote control



Slash, pulse, switch

Vertical line

Horizontal line




Waterproof / Dustproof



Earthquake resistance

2pc 18650 lithium battery
Continuous work for 20 hours!

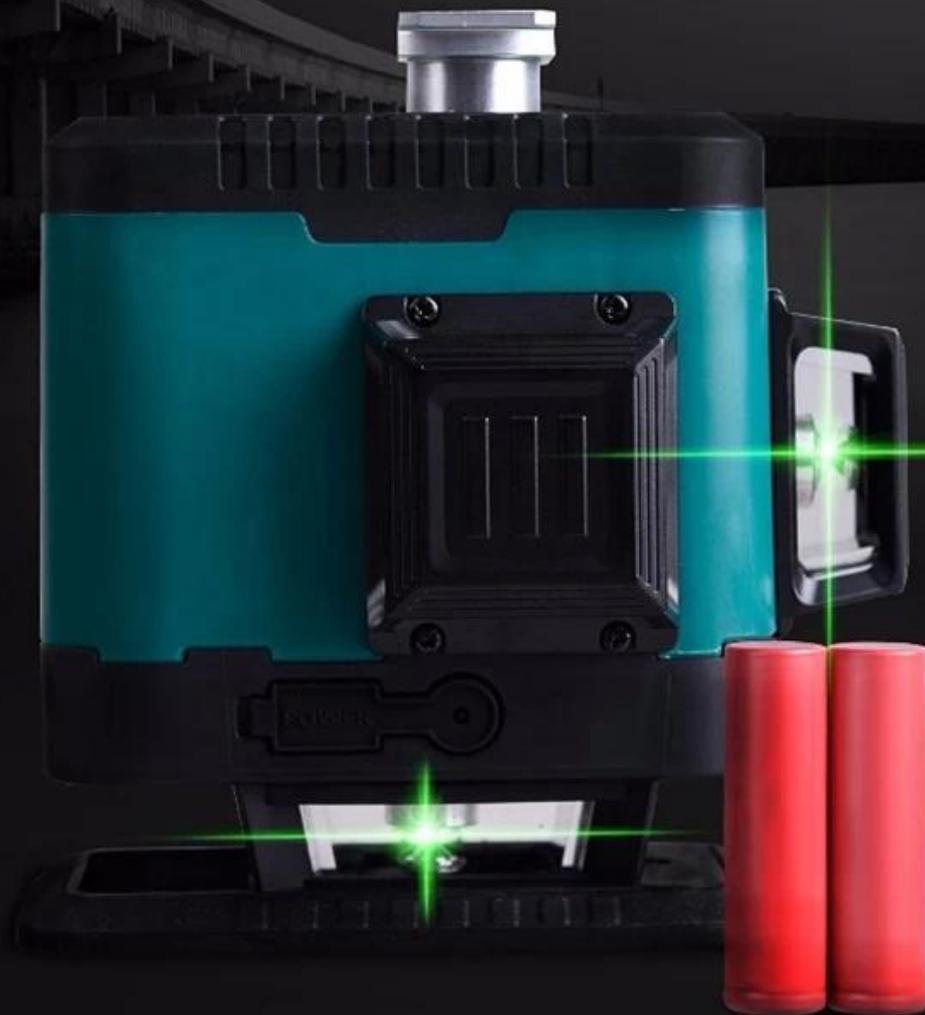

Product CE certification





Alarm device

$> 3^\circ$

Lift platform

highest : 9cm

lowest : 2.5cm



Wall bracket



Machine



Interface



● PACKAGE INCLUDE

XEAST[®]



SALES TEAM



WOKRSHOP

