

XEAST 2019 国際宇宙科学年 国際宇宙科学年 XE-26 & 国際宇宙科学年 XE-27

● SPECIFICATION

XEAST®

XE-26 & XE-27

項目	XE-26	XE-27
カメラセンサー IR:	33x33	33x33
動作温度範囲:	-20 °C ~ 380 °C / -4 °F ~ 716 °F	-20 °C ~ 380 °C / -4 °F ~ 716 °F
動作湿度範囲	± 2% RH ± 2 °C (± 4 °F)	± 2 °C (± 3.6 °F) RH ± 2% RH
ディスプレイ	2.4 "TFT 320x240 pixels	2.4 "TFT 320x240 pixels
最大撮影距離	300,000 pixels	300,000 pixels
視野角 (FOV):	33 ° X33	33 ° X33
解像度	0.5	0.5
動作温度範囲:	0.5 °C	0.15 °C
emissivity:	0.1-1.0	0.10 ~ 1.0
動作湿度範囲:	8-14µm	8-14µm
動作温度範囲	N / A	-20 °C ~ 70 °C / -4 °F ~ 158 °F: ± 1.0 °C (± 1.8 °F)
動作湿度範囲	N / A	0-100% RH: 30-10% RH, ± 3% RH, 0% RH : ± 4% RH
動作温度範囲	N / A	-30 °C ~ 100 °C / -22 °F ~ 212 °F: ± 1.0 °C (± 1.8 °F) (25 °C / 77 °F, 40-80% RH)
動作湿度範囲	N / A	-30 °C ~ 100 °C / -22 °F ~ 212 °F: ± 1.0 °C (± 1.8 °F) (25 °C / 77 °F, 40-80% RH)
電源	リチウムイオン電池	リチウムイオン電池, 充電器, ケース (充電器は別売)
動作温度範囲	9Hz	9Hz
動作湿度範囲	リチウムイオン電池	リチウムイオン電池
動作温度範囲:	リチウムイオン電池 SD (TF Micor) 8GB	リチウムイオン電池 SD (TF Micor) 8GB
動作湿度範囲	BMP	BMP
動作温度範囲	4 * 1.5V リチウムイオン電池 AA (充電器は別売) USB	4 * 1.5V" AA" リチウムイオン電池 (充電器は別売) USB
動作湿度範囲	6 pixels	6 pixels
動作温度範囲	-5 °C ~ 40 °C (23 °F ~ 104 °F)	-5 °C ~ 40 °C / 23 °F ~ 104 °F; 10% RH ~ 80% RH
動作湿度範囲	-20 °C ~ 50 °C (-4 °F ~ 122 °F)	-20 °C ~ 50 °C / -4 °F ~ 122 °F; 10% RH ~ 80RH
動作温度範囲:	260 * 200 * 102mm	260 * 200 * 112mm
動作湿度範囲:	0.3kg	0.35kg

XXXXXXXXXX:	1 * XXXXXXXXXXXXXXXXXXXXXXXXXX	1 * XXXXXXXXXXXXXXXXXXXXXXXXXX
	1 * XXXXXXXXXXXXXXXXXXXXXXXXXX USB Mini	1 * XXXXXXXXXXXXXXXXXXXXXXXXXX USB Mini
	1 * 8GB Mobile U Disk	1 * 8GB Mobile U Disk
	1 * XXXXXXXXXXXXXXXXXXXXXXXXXX	1 * XXXXXXXXXXXXXXXXXXXXXXXXXX
	1 * XXXXXXXXXXXXXXXXXXXXXXXXXX	1 * XXXXXXXXXXXXXXXXXXXXXXXXXX
	1 * XXXXXXXXXXXXXXXXXX	1 * XXXXXXXXXXXXXXXXXX
	1 * XXXXXXXXXXXXXXXXXX	1 * XXXXXXXXXXXXXXXXXX

● PRODUCT PICTURES

XEAST®







Temp & Humidity Sensor








 XEAST®



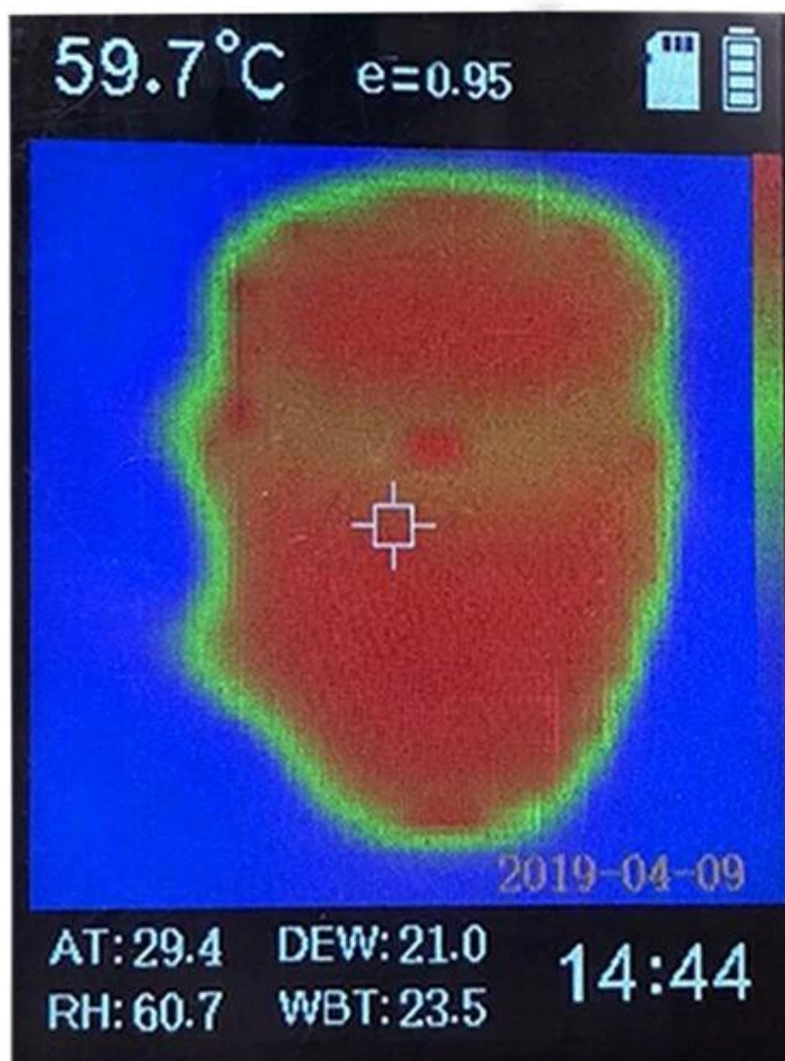

● PACKAGE INCLUDE

XEAST®





SALES TEAM



WOKRSHOP

