

● 產品規格

● 產品規格	20-50m	● 產品規格	660nm, 100mw / 532nm, 30mw
● 產品規格	1 個. ± 5 個	● 產品規格	II, & lt; 1mW
● 產品規格	± 3 °	● 產品規格	3.7 V 2000 mAh ● 產品規格
● 產品規格	& Amp; lt; 4s	● 產品規格	AA ● 產品規格 3 ● 產品規格
● 產品規格	● 產品規格	● 產品規格	AC ● 產品規格
● 產品規格	● 產品規格	● 產品規格	● 產品規格 (● 產品規格)
● 產品規格	● 產品規格	● 產品規格	● 產品規格 (● 產品規格 50 ● 產品規格)
● 產品規格	-10C ... + 40C	● 產品規格	0.62kg
● 產品規格	-20C ... + 70C	● 產品規格	130x90x130mm
● 產品規格	90%	Tripot mount	1/4 "5/8"
● 產品規格	IP: 54	● 產品規格	8 ● 產品規格
● 產品規格	● 產品規格	● 產品規格	● 產品規格
● 產品規格	● 產品規格 EVA ● 產品規格	● 產品規格	1 ● 產品規格
● 產品規格		● 產品規格	1 x ● 產品規格
● 產品規格		● 產品規格	1 x ● 產品規格
● 產品規格		● 產品規格	1 x ● 產品規格
● 產品規格		● 產品規格	1 x ● 產品規格
● 產品規格		● 產品規格	1 x ● 產品規格
● 產品規格		● 產品規格	1 x ● 產品規格
● 產品規格		● 產品規格	1 x ● 產品規格



XEAST®
PROFESSIONAL 3D LASER LEVEL
XE-61A


















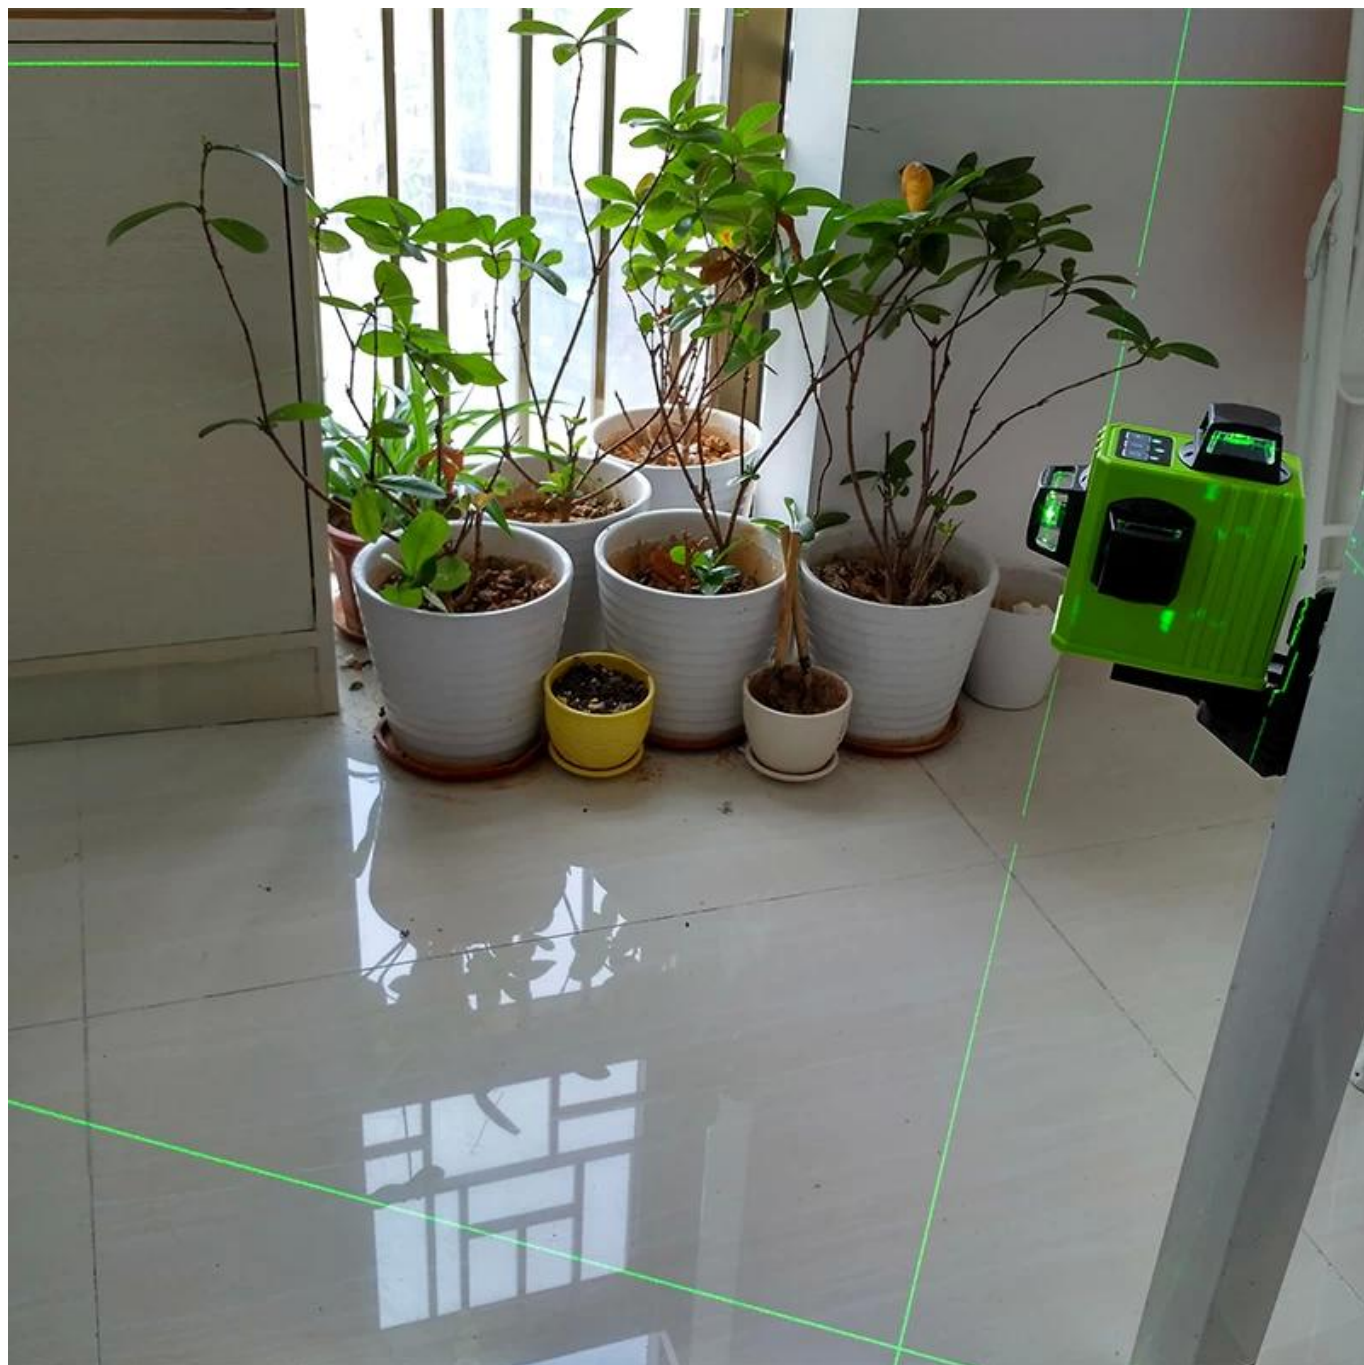



● PACKAGE INCLUDE

XEAST®



● TERMS OF TRADE

XEAST®

- [illegible]

● COMPANY INFORMATIONS

XEAST®



SALES TEAM



WOKRSHOP

