

HT-A1

Display	3.2 inch TFT
Resolution	220 * 160
Screen Size	35*200 mm
Resolution Accuracy	0.3 mm
Temperature Accuracy	0.07 °C
Temperature Range	-20 °C 4-) °C 300 °F to 572 °F)
Temperature Stability	± 2 (4 ±) °C 2 ± °F)
FOV / Field of View	35 ° X26 ° / 4.0MM
Resolution Accuracy	Resolution Accuracy: 8-14µm
Resolution Accuracy	0.1-10.0 mm
Resolution Accuracy	9 mm
Resolution Accuracy	mm
Resolution Accuracy	mm Resolution Accuracy: 25 mm
Resolution Accuracy	Resolution SD (4G)
Resolution Accuracy	JPG
Resolution Accuracy	Resolution Accuracy: USB2.0
Resolution Accuracy	5 Resolution Accuracy: 20 / Resolution Accuracy
Resolution Accuracy	Resolution Accuracy: °C
Resolution Accuracy	-5 °C 45 °C
Resolution Accuracy	-20 °C 60 °C
Resolution Accuracy	10 RH 80 RH
Resolution Accuracy	140 * 80 * 28MM / 5.51 * 3.14 * 1.1 "
Resolution Accuracy	450G
Resolution Accuracy	1 x Resolution Accuracy: 1 X 1 x Resolution Accuracy: 1 Resolution Accuracy: 1 Resolution Accuracy: 1

HT-A1

XEAST[®]





Application range



Car maintenance



Equipment inspection




Electric box check



Check exhaust system




Motor overhaul

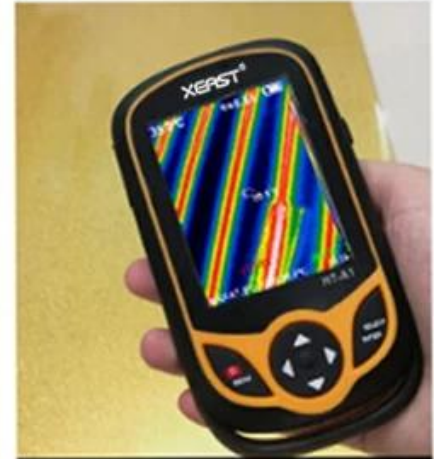

Detection of floor heating

Real shot display

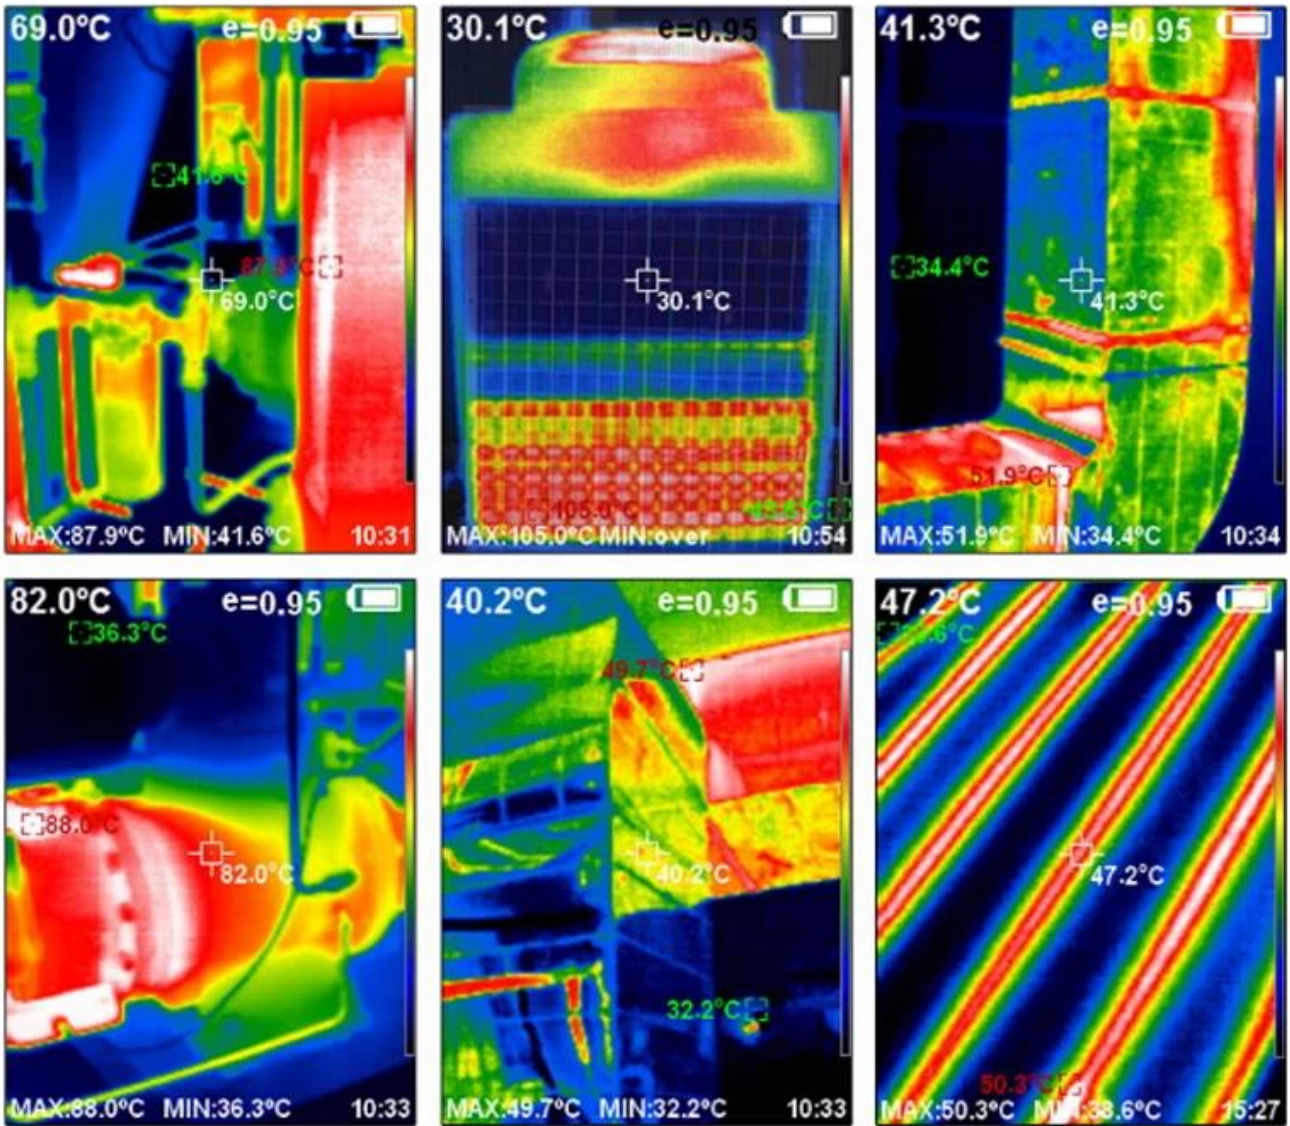

● PACKAGE INCLUDE

XEAST®

HT-A1



● **TERMS OF TRADE**

XEAST®

● **COMPANY INFORMATIONS**

XEAST®



SALES TEAM



WOKRSHOP

