

**SPECIFICATION**



**HT-02D**

重量	2.4kg
尺寸	32 * 32
分辨率	1024
像素间距	0.3mm
测温范围	-20°C~300°C / -4°F~572°F
测温精度	±2°C / ±2°C / ±4°F
FOV / 视场角	20 * 20 / 0.5°
测温分辨率	0.5°C
探测波长	8-14μm
探测距离	0.1-1.0m
刷新率	6HZ
镜头	镜头
镜头	镜头
镜头	5mm
存储	SD卡4G
存储	BMP
存储	镜头/镜头/镜头/镜头
存储	4 * 1.5V AA
存储	6mm
存储	12mm
认证	CE RoHS
存储	-5°C~40°C / 23°F~104°F
存储	-20°C~50°C / -4°F~122°F
存储	10%RH~80%RH
存储	21.2 * 9 * 6.2mm / 8.3 * 3.5 * 2.4mm
存储	231.2mm / 8.2mm
存储	27 * 19 * 11mm / 10.6 * 7.5 * 4.3mm
存储	927mm / 32.7mm
附件	1 * 镜头 1 * SD卡4G 1 * 镜头 1 * 镜头 1 * 镜头

**PRODUCT PICTURES**



**Thermal Imager HT-02D**












● APPLICATIONS

**XEAST®**

XXXXXXXX XX HT02D

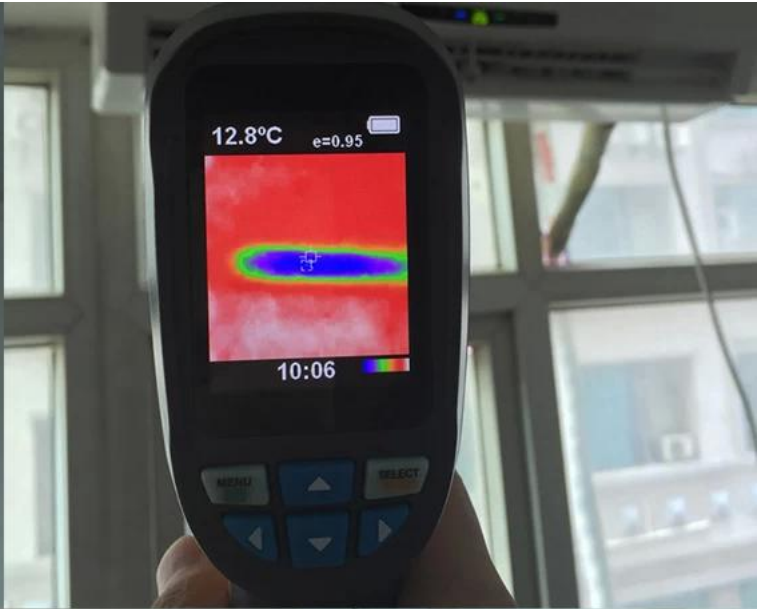

**● TERMS OF TRADE**



**1. 付款条件**

1. 付款方式：T / T / C / Paypal / MoneyGram / Western Union  
2. 付款期限：30天 / 70天

3. 运输条件：DHL / TNT / UPS / FEDEX / EMS / SPSR / 139  
4. 其他条件：...

**● COMPANY INFORMATIONS**





**SALES TEAM**



**WOKRSHOP**

