

**XEAST 2019 XE-26 Thermal Imager XE-27**

**SPECIFICATION**



XE-26 & XE-27

	<b>XE-26</b>	<b>XE-27</b>
Resolution	33x33	33x33
Temperature Range	-20°C~380°C/ -4°F~716°F	-20°C~380°C/ -4°F~716°F
Accuracy	±2°C±2°C±4°F	±2°C±3.6°F±2
Display	2.4" TFT 320x240	2.4" TFT 320x240
Pixel	300,000	300,000
FOV	33°X33°	33°X33°
Resolution	0.5	0.5
Resolution	0.5°C	0.15°C
Resolution	0.1-1.0	0.10~1.0
Resolution	8-14µm	8-14um
Resolution	N / A	-20°C~70°C/ -4°F~158°F±1.0°C±1.8°F
Resolution	N / A	0-100RH±30-10RH±3RH±4RH
Resolution	N / A	-30°C~100°C/ -22°F~212°F±1.0°C±1.8°F±25°C/ 77°F±40-80RH
Resolution	N / A	-30°C~100°C/ -22°F~212°F±1.0°C±1.8°F±25°C/ 77°F±40-80RH
Resolution		
Resolution	9HZ	9HZ
Resolution		
Resolution	SD TF Micor 8GB	SD TF Micor 8GB
Resolution	BMP	BMP
Resolution	4 * 1.5V AA USB	4 * 1.5V "AA" USB
Resolution	6	6
Resolution	-5°C~40°C/ 23°F~104°F	-5°C~40°C/ 23°F~104°F; 10RH~80RH
Resolution	-20°C~50°C/ -4°F~122°F	-20°C~50°C/ -4°F~122°F; 10RH~80RH
Resolution	260 * 200 * 102	260 * 200 * 112
Resolution	0.3	0.35

<p>□□□□□</p>	<p>1 *□□□□□□  1 *□□□□USB□□□□  1 * 8GB□□□□U□  1 *□□□□  1 *□□□□□□  1 *□□□□□□  1 *□□□□</p>	<p>1 *□□□□□□  1 *□□□□USB□□□□  1 * 8GB□□□□U□  1 *□□□□  1 *□□□□□□  1 *□□□□□□  1 *□□□□</p>
--------------	---	---

● **PRODUCT PICTURES**







Temp & Humidity Sensor








 XEAST®



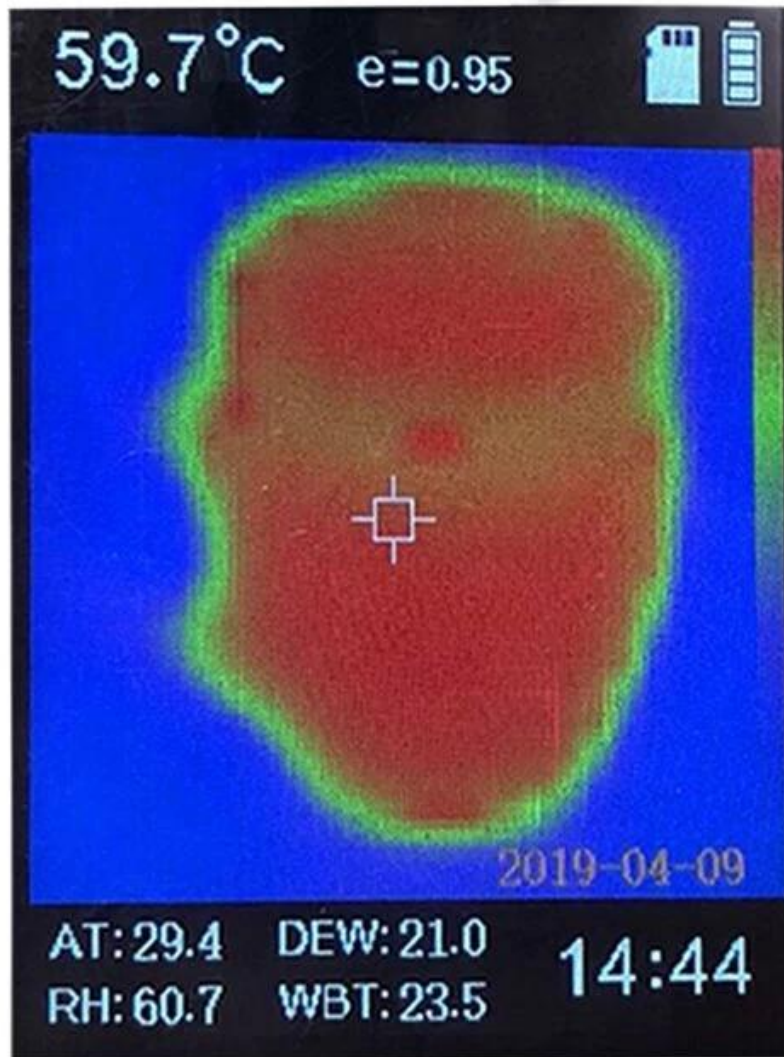







**SALES TEAM**



**WOKRSHOP**

