

SPECIFICATION



XE-27

Model	XE-27
IR	33x33
Temp Range	-20°C~380°C/ -4°F~716°F
Accuracy	±2°C±3.6°F±2%
Display	2.4 "TFT 320 x 240
Resolution	300000
FOV	33°x33°
Depth	0.5mm
Temp. Res.	0.15°C
Temp. Res.	0.10~1.0
Temp. Res.	8~14um
Temp. Res.	-20°C~70°C/ -4°F~158°F±1.0°C±1.8°F
Temp. Res.	0~100%RH~30~10%RH±3%RH±4%RH
Temp. Res.	-30°C~100°C/ -22°F~212°F±1.0°C±1.8°F~25°C/ 77°F~40-80%RH
Temp. Res.	-30°C~100°C/ -22°F~212°F±1.0°C±1.8°F~25°C/ 77°F~40-80%RH
Temp. Res.	
Temp. Res.	9Hz
Temp. Res.	
Temp. Res.	SD TF 8GB
Temp. Res.	BMP
Temp. Res.	4 * 1.5V AA USB
Temp. Res.	6
Temp. Res.	-5°C~40°C/ 23°F~104°F; 10%RH~80%RH
Temp. Res.	-20°C~50°C/ -4°F~122°F; 10%RH~80RH
Temp. Res.	260x200x112mm
Temp. Res.	0.35kg
Temp. Res.	1 * 1 * USB 1 * 8GB U 1 * 1 * 1 * 1 *

PRODUCT PICTURES








Temp & Humidity Sensor



Temp. range:
-20 to 380°C/-4 to 716°F

Accuracy:
±2% or ±2.0°C/3.6°F



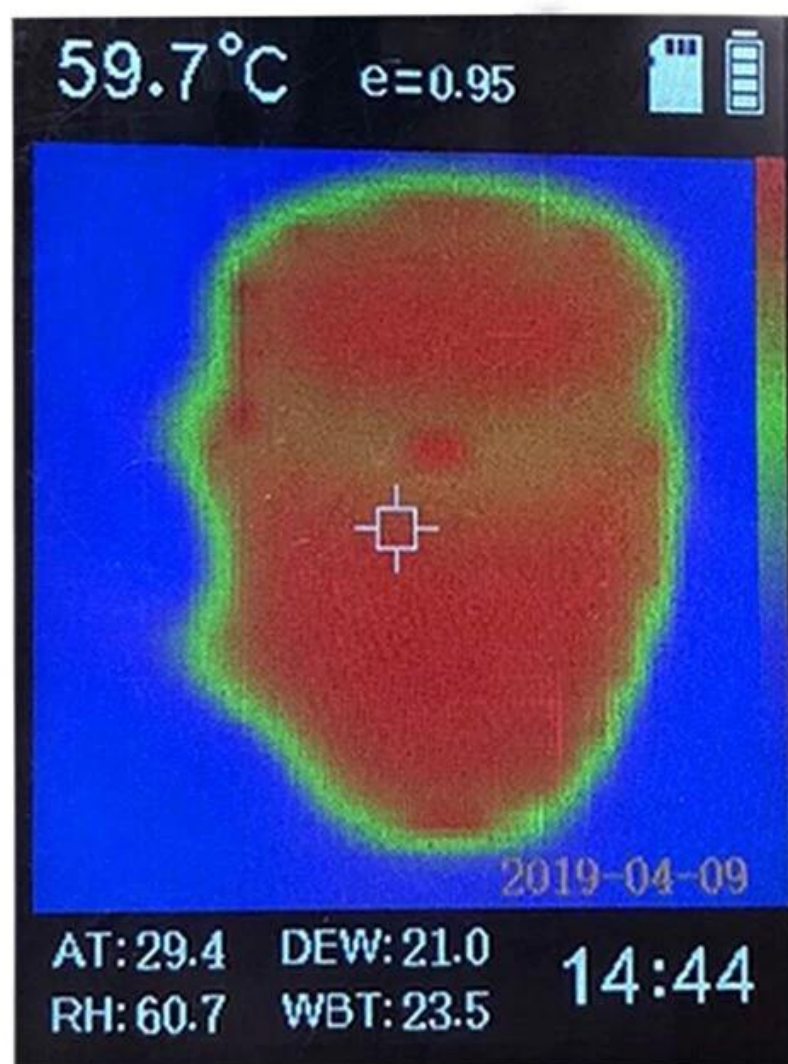



Temp & Humidity Sensor



● PACKAGE INCLUDE







SALES TEAM



WOKRSHOP

