

SPECIFICATION



| | |
|-----------------|--------------|
| Model | XE-M02 |
| Code | 1V1H |
| Beam Angle | H110°/ V110° |
| Beam Diameter | 2mm |
| Power | 20mW |
| Wavelength | 635nm |
| H / V Size | 3mm±10m |
| Beam Divergence | 4°±1° |
| Response Time | ≤3s |
| Beam Spot Size | 30m~40m |
| Material | GT 10 |
| Battery | 2 * AA LR6 |
| IP Rating | IP54 |
| Operating Temp | -10°C~50°C |
| Storage Temp | -20°C~70°C |
| Dimensions | 1/4 " - 20 |
| Weight | 0.7KG |

PRODUCT PICTURES



XEAST[®]



□□□□□ 2□□□□□□□□□□□□ □□□□□□ 20m 30m 2□□□□□□□□□□ □□□□□□□□□□□□



0020000000 000000



1/4-20 Mounting Thread



Battery Cell

1 / 4-20

2 x AA (No included)




● PACKAGE INCLUDE

XEAST®



● APPLICATIONS



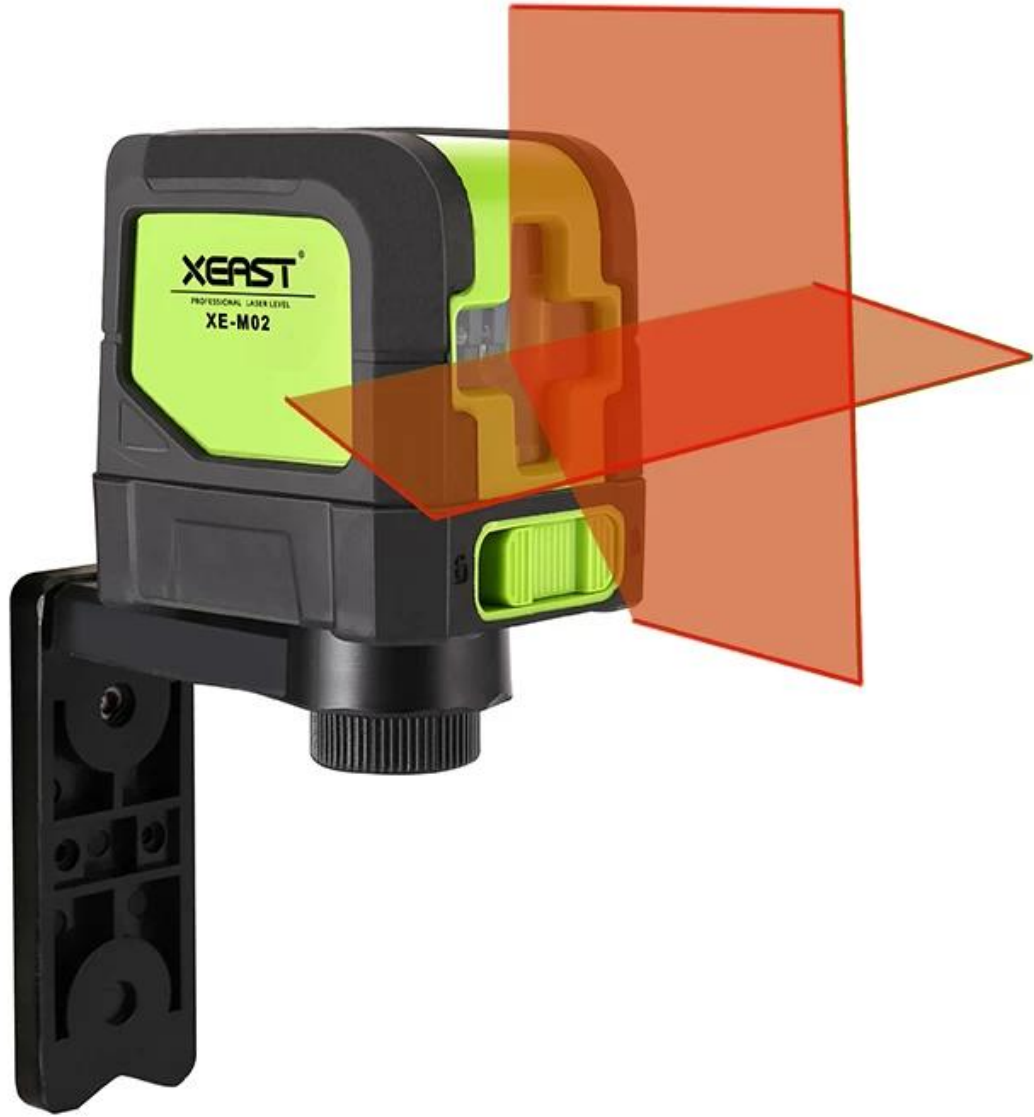

● **TERMS OF TRADE**



1. 30 days / 70 days

2. 30 days / 70 days

Express, DHL, TNT, UPS, FEDEX, EMS, SPSR, 139 Express, LCL, FCL

30 days / 70 days

● **COMPANY INFORMATIONS**





SALES TEAM



WOKRSHOP

