

**SPECIFICATION**



此聲壓計，採用 MCU 晶片，具備數位濾波功能，可消除背景雜音。Sound Level Meter 工程師，設計，此款聲壓計，採用高品質的麥克風，可精確測量聲壓。數位，顯示。

測試標準	IEC61672-1 CLASS2
測量範圍	35dB ~ 135dB
顯示值	50dB
頻率範圍	31.5Hz ~ 8KHz
精度	± 2.0dB
響應時間	快速 125ms / 慢速 1s
顯示模式	1/2 顯示 最大 最小 平均值
最大顯示值	> 100dB, LCD "Hi"
最小顯示值	< 100dB, LCD "LO"
工作溫度	-20 °C ~ 70 °C / -4 °F ~ 158 °F
溫度精度	± 1.5 °C / 2.7 °F
顯示	0.1
響應時間	300ms
顯示	每 60 秒
電池	3 * 1.5V "AAA" 電池 15 小時 顯示 電池 指示
電池	3 * 1.5V "AAA" 電池
工作濕度	-20 °C ~ 60 °C / -4 °F ~ 140 °F, 10RH % ~ 90RH %
儲存濕度	-20 °C ~ 60 °C / -4 °F ~ 140 °F, 10RH % ~ 75RH %
尺寸	144 * 56 * 30.5mm
重量	73g

註：所有數據均為典型值，實際值可能因環境條件而異。

**PRODUCT PICTURES**










## Meter description

1. Windscreen microphone cover
2. LCD Display
3. Hold button
4. Power on/off button
5. MAX/MIN
6. Fast/ Slow selection key
7. Battery compartment
8. Nameplate

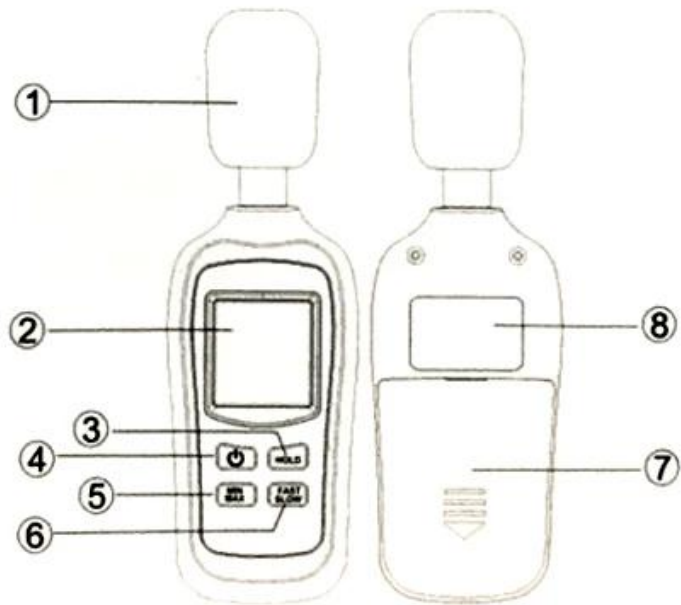

## LCD display description

1. Data hold Icon
2. Auto power off Icon
3. Temperature readings
4. Sound level readings
5. Fast/Slow Icon
6. Hi/Lo Icon
7. Frequency weighting Icon
8. Temperature unit Icon
9. Low battery Icon
10. MAX/MIN Icon



● **PACKAGE INCLUDE**

**XEAST®**

● **TERMS OF TRADE**

**XEAST®**

● **COMPANY INFORMATIONS**

**XEAST®**



**SALES TEAM**



**WOKRSHOP**

