

HT-A1


Display	3.2 inch TFT
Resolution	220 * 160
Pixel	35,200
Resolution	0.3 mm
Temp	0.07 °C
Temp Range	-20 °C ~ 300 °C (-4 °F ~ 572 °F)
Accuracy	± 2 % ± 2 °C (± 4 °F)
FOV / Lens	35 ° x 26 ° / 4.0mm
Material	ABS, PC, PMMA, PS, PE
Wavelength	8-14µm
Resolution	0.1 ~ 10.0 mm
Frequency	9 HZ
Power	1W
Humidity	25 % RH
Storage	SD (4G)
Format	JPG
Interface	USB
USB	USB2.0
Dimensions	5 / 20 / 1 mm
Compliance	CE, RoHS
Temp Range	-5 °C ~ 45 °C
Temp Range	-20 °C ~ 60 °C
Humidity	10 % RH ~ 80 % RH
Dimensions	140 * 80 * 28mm / 5.51 * 3.14 * 1.1 "
Weight	450g
Accessories	1 x USB cable 1 x SD card 1 x User manual 1 x Infrared sensor 1 x Infrared sensor

HT-A1

XEAST[®]





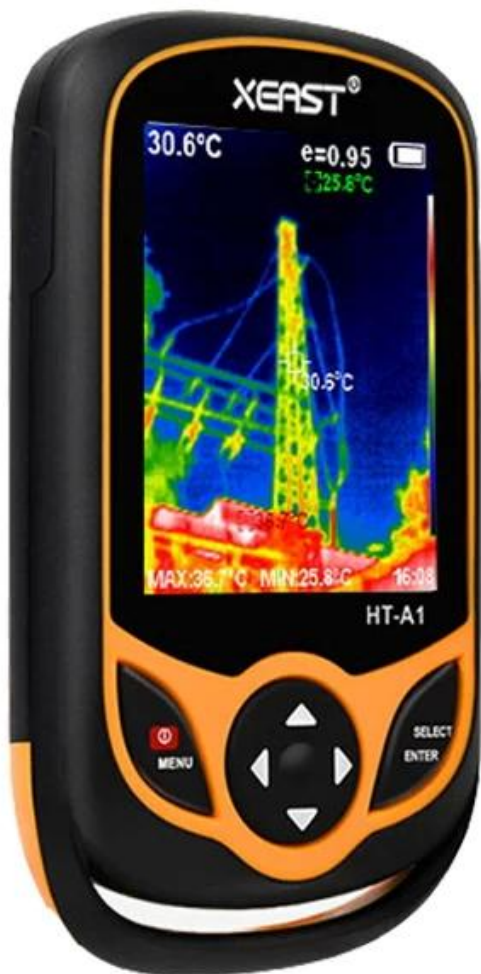

Capture saved images

Can be connected to the computer through USB

Export view and analysis

● APPLICATIONS

Application range



Car maintenance



Equipment inspection




Electric box check



Check exhaust system




Motor overhaul

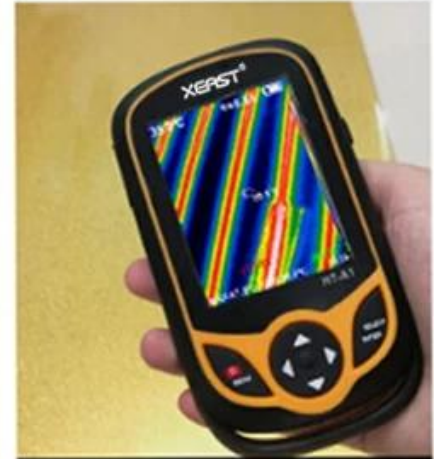

Detection of floor heating

Real shot display

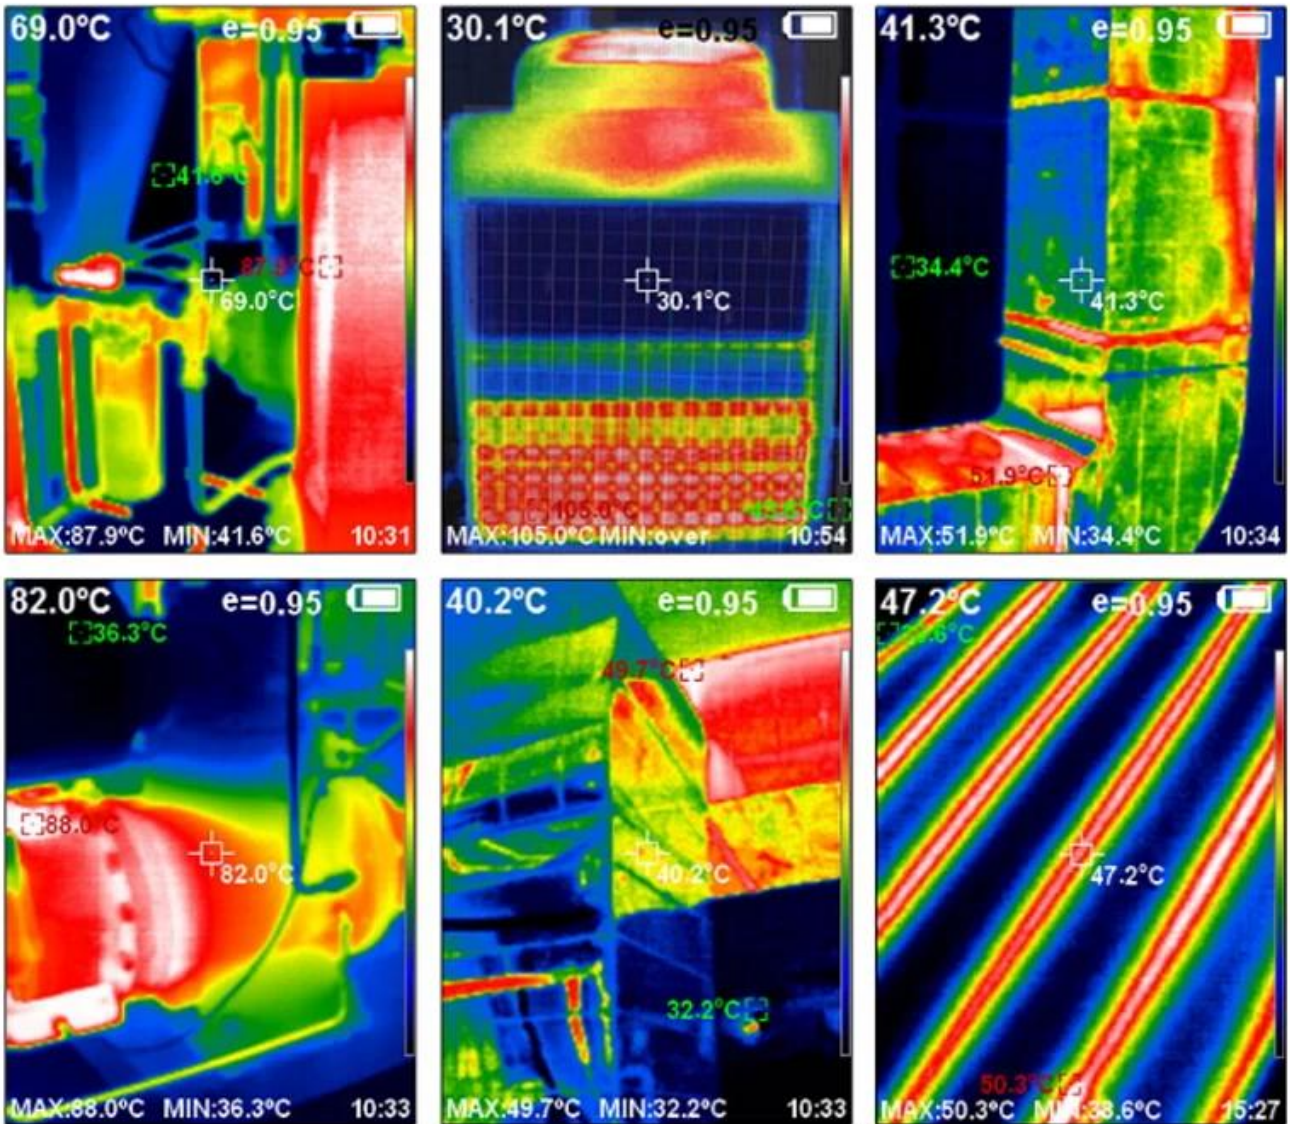

● PACKAGE INCLUDE

XEAST®

HT-A1



● **TERMS OF TRADE**

XEAST®

● **COMPANY INFORMATIONS**

XEAST®



SALES TEAM



WOKRSHOP

