

XEAST 2019 1000 1000 1000 XE-26 & 1000 1000 1000 XE-27

SPECIFICATION



1000 1000 1000 1000 XE-26 & XE-27

1000	XE-26	XE-27
IR 1000 :	33x33	33x33
1000 1000 :	-20 °C ~ 380 °C / -4 °F ~ 716 °F	-20 °C ~ 380 °C / -4 °F ~ 716 °F
1000	± 2 % 1000 ± 2 °C (± 4 °F)	± 2 °C (± 3.6 °F) 1000 1000 ± 2 %
1000000	2.4 "TFT 320x240 1000 1000	2.4 "TFT 320x240 1000 1000
1000 1000	300,000 1000	300,000 1000
1000 (FOV) :	33 ° x33 °	33 ° x33 °
1000 1000 1000 :	0.5m	0.5m
1000 :	0.5 °C	0.15 °C
1000 :	0.1 ~ 1.0 1000 1000	0.10 ~ 1.0 1000 1000
1000 1000 :	8-14µm	8-14um
1000 1000	N / A	-20 °C ~ 70 °C / -4 °F ~ 158 °F : ± 1.0 °C (± 1.8 °F)
1000 1000	N / A	0-100 % RH : 30-10 % RH, ± 3 % RH, 1000 : ± 4 % RH
1000 1000	N / A	-30 °C ~ 100 °C / -22 °F ~ 212 °F : ± 1.0 °C (± 1.8 °F) (25 °C / 77 °F, 40-80 % RH)
1000 1000	N / A	-30 °C ~ 100 °C / -22 °F ~ 212 °F : ± 1.0 °C (± 1.8 °F) (25 °C / 77 °F, 40-80 % RH)
1000 1000	1000 1000, 1000000 1000 1000	1000 1000, 1000000, 1000 (1000 1000) 1000 (1000 1000)
1000 1000 1000	9HZ	9Hz
1000 1000	1000	1000
1000 1000 :	SD 1000 (TF Micor) 8GB	SD 1000 (TF Micor) 8GB
1000 1000	BMP	BMP
1000 1000	4 * 1.5V AA 1000 (1000000 1000) 1000 USB	4 * 1.5V "AA"1000 1000 1000 (1000000 1000) 1000 USB
1000 1000	6 1000	6 1000
1000 1000	-5 °C ~ 40 °C (23 °F ~ 104 °F)	-5 °C ~ 40 °C / 23 °F ~ 104 °F, 10 % RH ~ 80 % RH
1000 1000	-20 °C ~ 50 °C (-4 °F ~ 122 °F)	-20 °C ~ 50 °C / -4 °F ~ 122 °F, 10 % RH ~ 80RH
1000 1000 :	260 * 200 * 102mm	260 * 200 * 112mm
1000 1000 :	0.3kg	0.35kg

<p>□□□ □□□ :</p>	<p>1 * □□□ □ □□ □ 1 * □□ USB □□□ □□□ 1 * 8GB □□□ U □□□ 1 * □□ □□□ 1 * □□ □□ 1 * □□□ □□□ 1 * □□ □□</p>	<p>1 * □□□ □ □□ □ 1 * □□ USB □□□ □□□ 1 * 8GB □□□ U □□□ 1 * □□ □□□ 1 * □□ □□ 1 * □□□ □□□ 1 * □□ □□</p>
------------------	---	---

● **PRODUCT PICTURES**

XEAST®







Temp & Humidity Sensor








 XEAST®



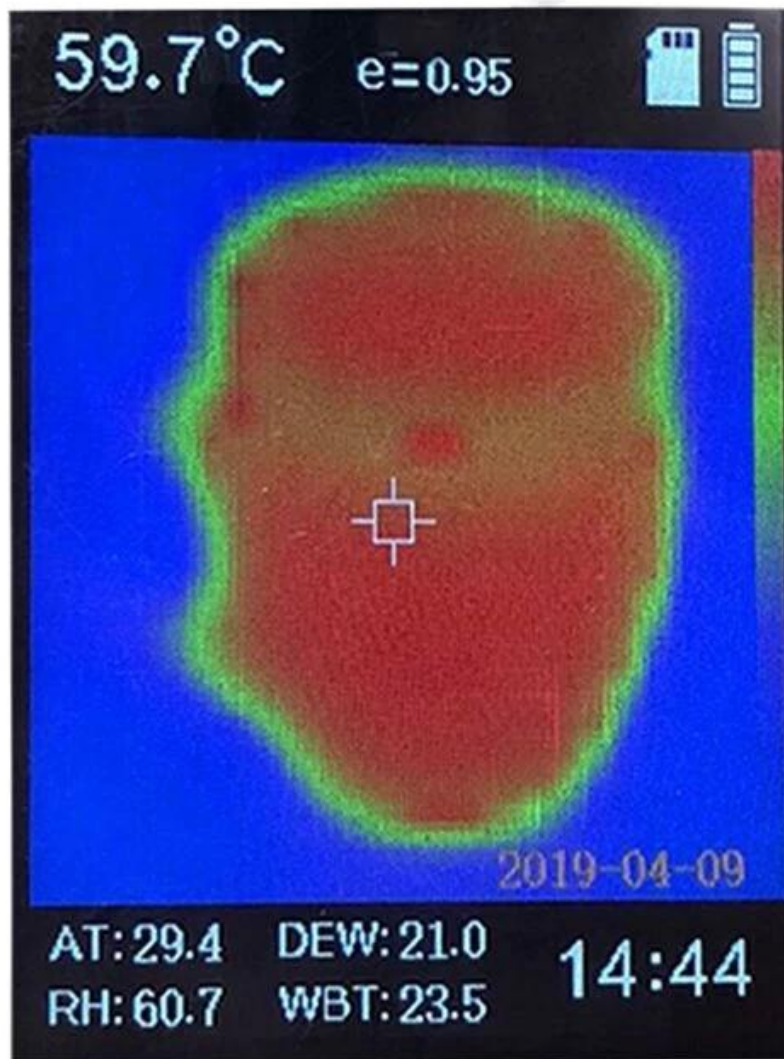





SALES TEAM



WOKRSHOP

