
● SPECIFICATION

XEAST®

照射波長 : 532nm

照射径 : ± 3mm / 10m

照射角 : plusmn4deg

照射時間 (連続) : 20m

照射回数 : 18650 回 連続

照射回数 : 6 回

照射温度 : -10degC ~ + 55degC

照射モード : 連続 II

照射モード : IP 54

照射モード : □

● PRODUCT PICTURES

XEAST®

 XEAST®














Long press (OUT) button to enable tilt function

you can use tripod or other bracket
place the laser tool at various angles.

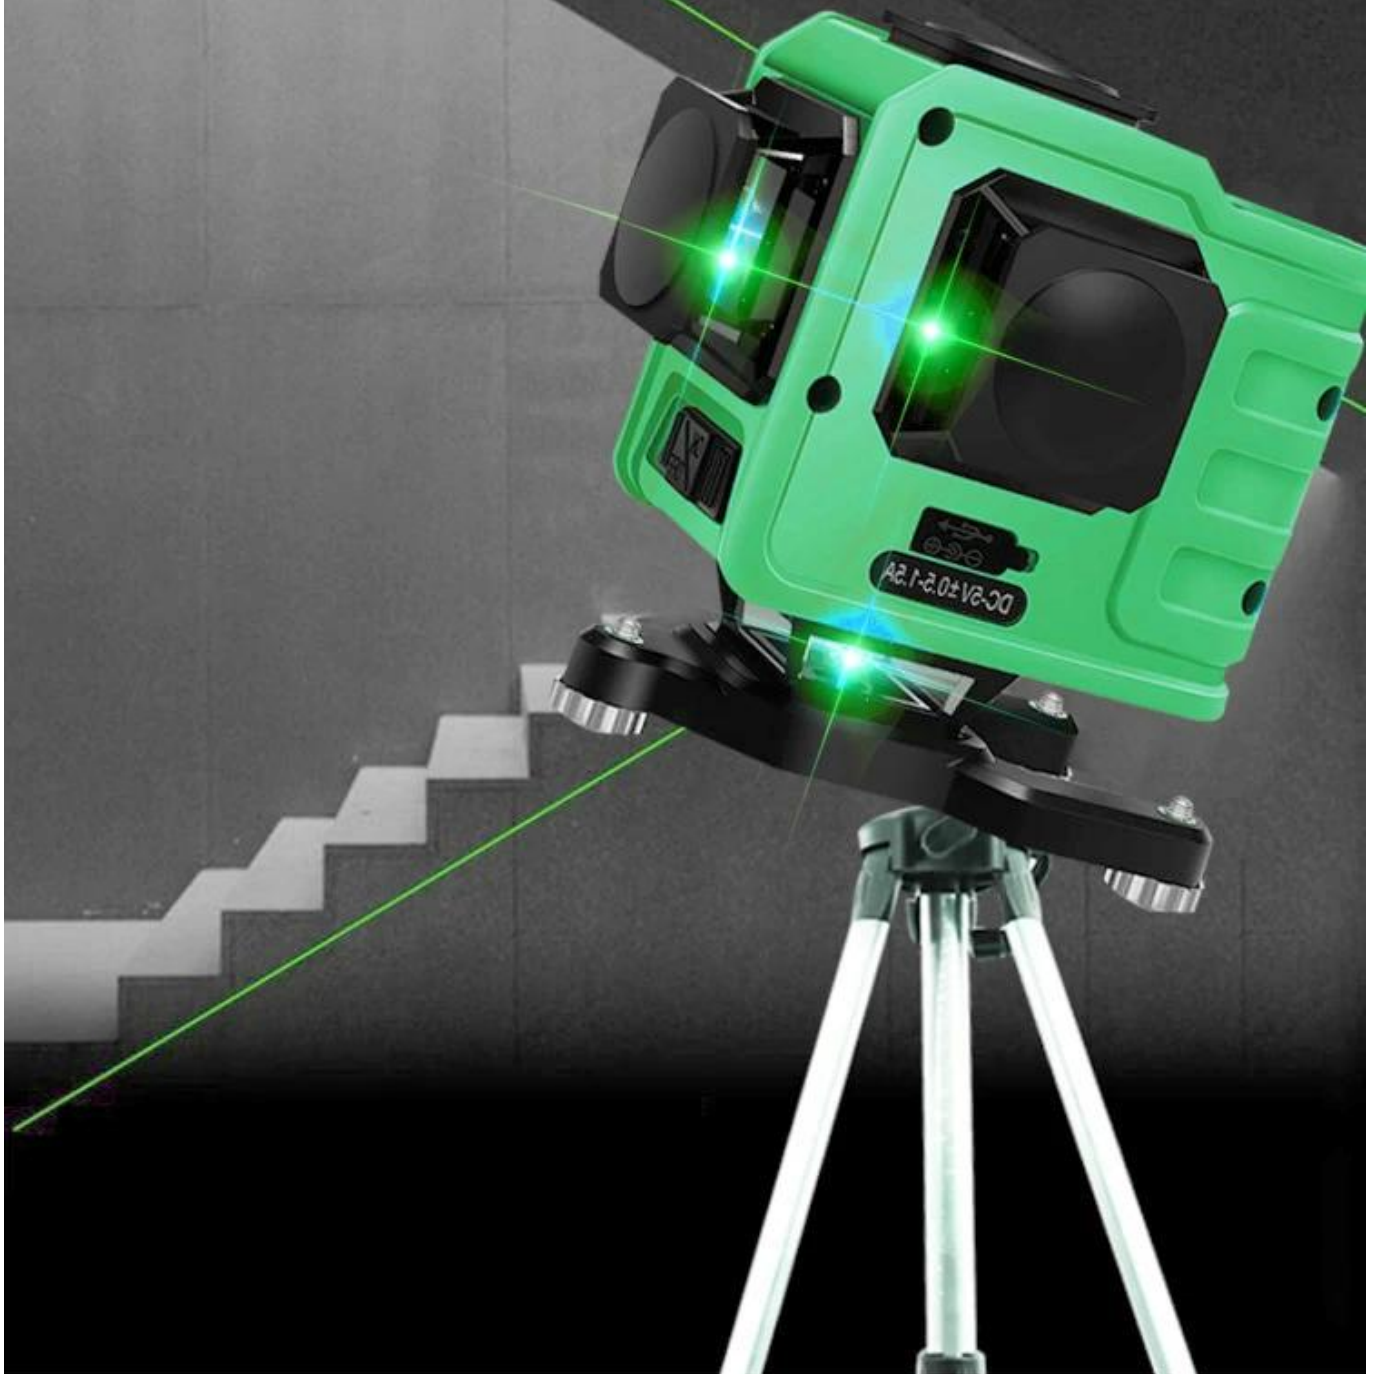

self leveling

alarm prompt $\leq 4^\circ$ self-leveling

$\geq 4^\circ$ buzzer alarm



Intelligent remote control convenient and quick



● PACKAGE INCLUDE

XEAST®



● TERMS OF TRADE



1). 付款 方式 : 电汇 T / T, L / C, Paypal, MoneyGram 或 Western Union 均可。

电汇 30 % 定金 或 70 % 定金。

2). 付款方式 :

电汇 电汇 或 电汇 或 电汇 或 电汇 或 电汇。 电汇 oftern 电汇 电汇 (DHL, TNT, UPS, 电汇 电汇, EMS, SPSR, 139 电汇 电汇), LCL, FCL

3). 电汇 电汇 电汇 电汇 电汇, 电汇 电汇 电汇 电汇 电汇 电汇 电汇。

● COMPANY INFORMATIONS





SALES TEAM



WOKRSHOP

