

● SPECIFICATION

Model	XE-M02
Beam	1V1H
Beam Angle	H110° / V110°
Beam Diameter	2mm
Power	20mW
Wavelength	635nm
H / V Spot Size	3mm ± 10mm
Beam Divergence	4° ± 1°
Response Time	≤3s
Beam Range (Class II)	30m, ≥40m
Beam Class	& Class II; 10m (Class II)
Battery	2 * AA (LR6)
IP Rating	IP54
Operating Temp	-10 °C ~ 50 °C
Storage Temp	-20 °C ~ 70 °C
Dimensions	1 / 4" - 20
Weight	0.7KG

● PRODUCT PICTURES

XEAST®



2 20m 30m 2



□□ 2 □□ □□ □□ □□□□



□□□ □□ □□ □□□□ □□□ □ □□ □□□ □□□□□□.

1/4-20 Mounting Thread



Battery Cell

1 / 4-20 □□□ □□ □ □□□ □

2 x AA (No included)



● PACKAGE INCLUDE


XEAST®



00 0000 00 00 00 00 00, 2 0 000-00-00 L 0 000, 00 0 00 0 00 00

● APPLICATIONS

XEAST[®]

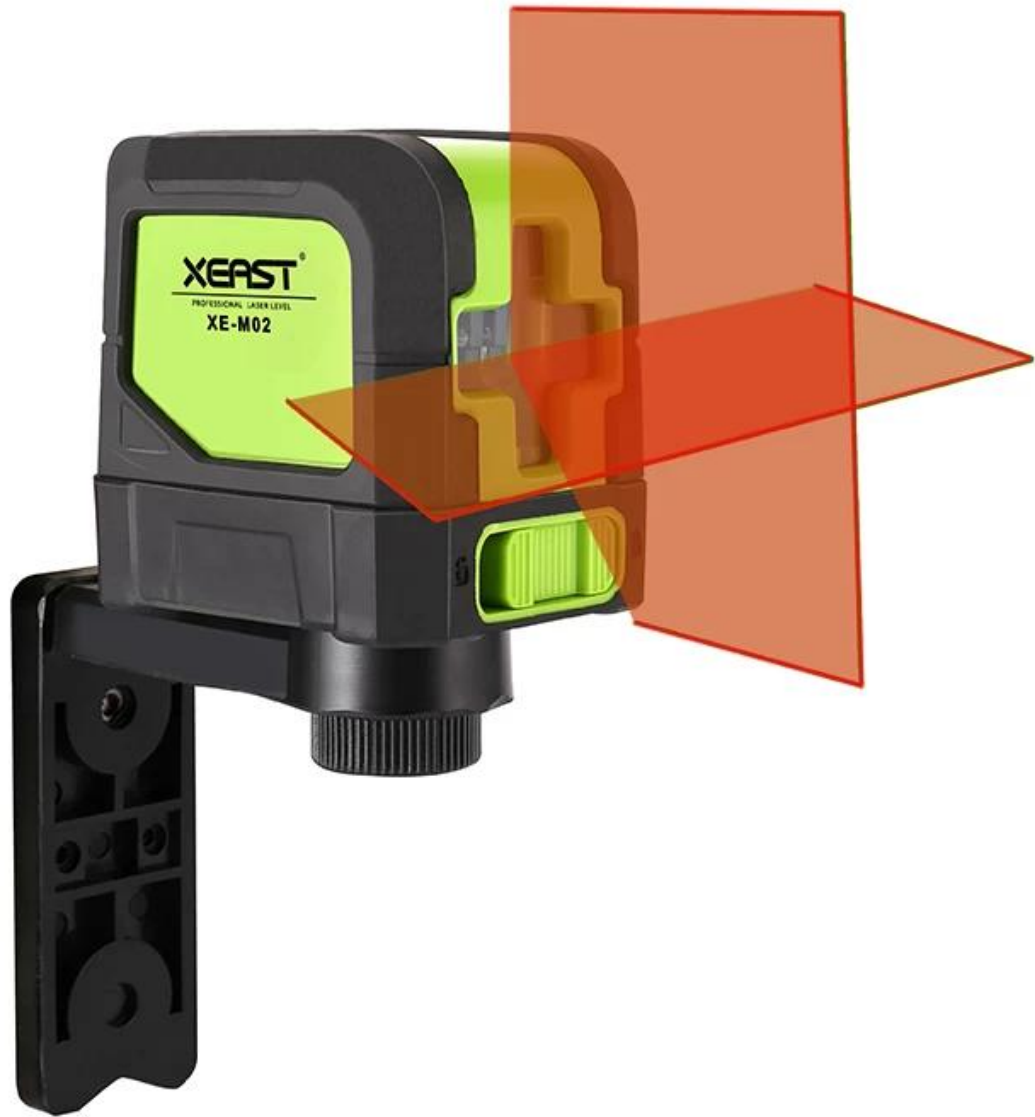

● TERMS OF TRADE

XEAST®

1). 𐀀𐀀 𐀀𐀀 :

𐀀𐀀 T / T, L / C, Paypal, MoneyGram 𐀀 Western Union 𐀀 𐀀𐀀𐀀𐀀.

𐀀𐀀 𐀀𐀀 30 % 𐀀𐀀 70 % 𐀀𐀀.

2). 𐀀𐀀 𐀀𐀀 :

𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀. 𐀀𐀀 𐀀𐀀𐀀𐀀 (DHL, TNT, UPS, 𐀀𐀀, EMS, SPSR, 139 𐀀𐀀𐀀𐀀 𐀀), LCL, FCL

𐀀𐀀 𐀀𐀀 𐀀𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀 𐀀𐀀.

● COMPANY INFORMATIONS

XEAST®



SALES TEAM



WOKRSHOP

