自平衡范围为4±1度

坚固的超模压外壳

超亮激光束允许所有可能的应用

IP54 - 防水防尘

简化布局任务并提高生产力

中央锁定机制有助于保护内部

激光水平 参数:

XE-903激光水平仪:

激光波长: 510nm~530nm

防水等级: IP54

总体精度: ±3mm / 10m

正交各向异性精度: 90°±30“

调平范围: 4°±1°

线宽: 2mm / 10m。

工作距离（线路）: 40米，最长50米，配有激光探测器

电源插头: 欧盟加

工作能力: 锂电池

工作时间: 所有激光束开启6小时

激光等级: II

倾斜功能: 是

操作温度范围: -10°c - + 50°c

储存温度范围: -20°C - + 70°c

激光接收器规格:

PWM: 1: 1

频率: 10KHz（匹配PWM和频率，线路激光器可与LR-6RG激光接收器配合使用）

显示: 三面LED指示灯显示

调平精度: ±1.5mm（±1/17 In。）

激光接收窗口宽度: 20毫米（4/5英寸）

激光接收窗口高度: 20毫米（4/5英寸）

工作距离: 50米（200英尺）

工作时间: 70小时

自动关机:(未检测到信号) 8分钟

电源: 1 * 9V干电池

工作温度范围: -10℃至+ 50℃

储存温度范围: -25℃至+ 70℃

尺寸（长x宽x高）: 140.5mm×60mm×35mm（5.5 x 2.5 x 1.5英寸）

PRODUCT PICTURES

XEAST®

CAUTION !

0.91in/23mm
3.58in/91mm
1.69in/43mm
2.56in/65mm
3.5in/89mm

laser window
on-off key/pulse-function button
XEAST
battery charge interface
1/4 thread interface
Battery compartment
lithium battery

Sensing Window
Horizontal Vial
2.48in/63mm
1.06in/27mm
LED Display
Power Indicator
Volume Switch
30mm(1.18in)
LED Display
Marking Position
.51in/140mm
Vertical Vial
Battery Door
1/4-20 Threaded Mount

ON
OFF

Slower beeping tone signals
Fast beeping tone signals
Beeping tone signals

self-leveling mode

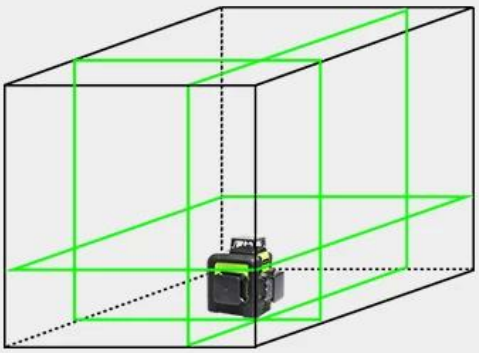

Self-level Available

Within 4 Degree

≤ ±4°

Pendulum Unlocked

manual mode

Maintain The 90° Angles

Blinks Every 3 Seconds

Pendulum Locked

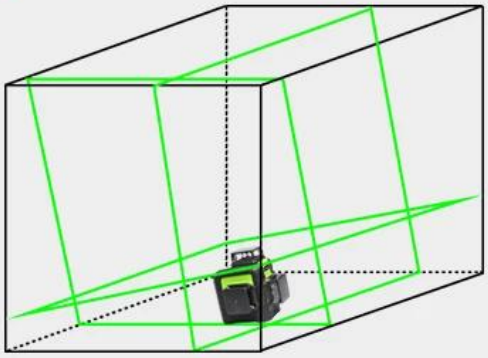

POWER ON

Short press the power key or slide locking switch to turn the laser tool ON.

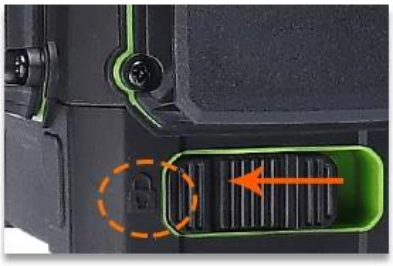

OFF

Lock the pendulum before short pressthe power button to turn the laser tool OFF.

1: After power on, short press the power switch once a time,the laser tool will project horizontal line, vertical line and cross line in turn.

2: After power on,long press the power key,when the blue light is on, the pulse mode is on.

GERMANY OSRAM GREEN LASER TECHNOLOGY

More brighter to ordinary green beam and red beam

VARIOUS KINDS OF FIXING METHOD

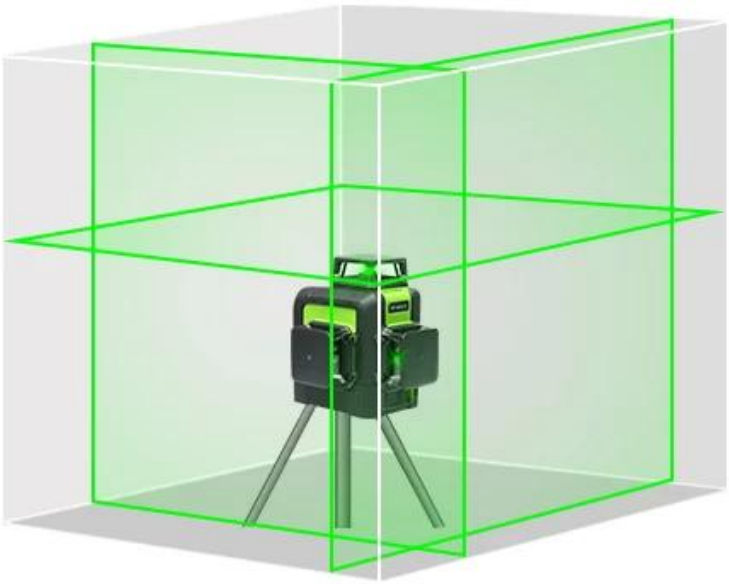

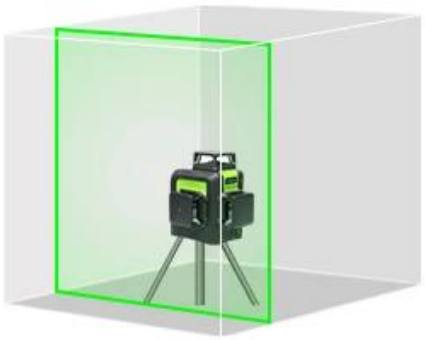

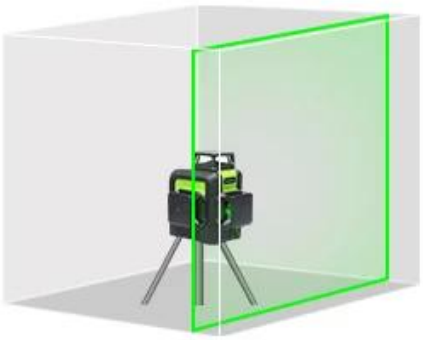

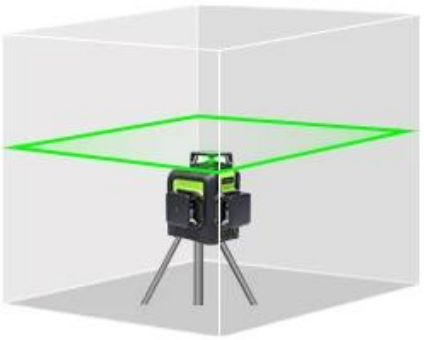

Three line switching function

Horizontal and vertical lines	Horizontal	vertical lines	vertical lines
			

Horizontal and vertical lines	Horizontal	vertical lines	vertical lines
			

XEAST
Please turn on
Pulse Mode of the
Laser level
before using
the reciever

Package Include

XEAST®

TERMS OF TRADE

1）。付款条件：我们接受T / T, L / C, Paypal, MoneyGram和Western Union。
装运前30%定金和其他70%余额。
2）。运送条款：
这取决于客户的订单数量和您的特殊要求。我们采用快递（DHL, TNT, UPS, FEDEX, EMS, SPSR, 139快递等），拼箱，整箱
3）。物品在发货前会仔细检查，我们会在货物发出后及时更新送货状态。

COMPANY INFORMATIONS

SALES TEAM

XEAST®

Your Testing Partner

WOKRSHOP